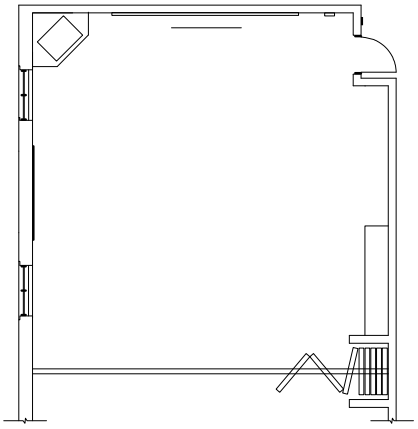

CLASSROOM WITH OPTIONAL FOLDING WALL

0 8' 4' 16'

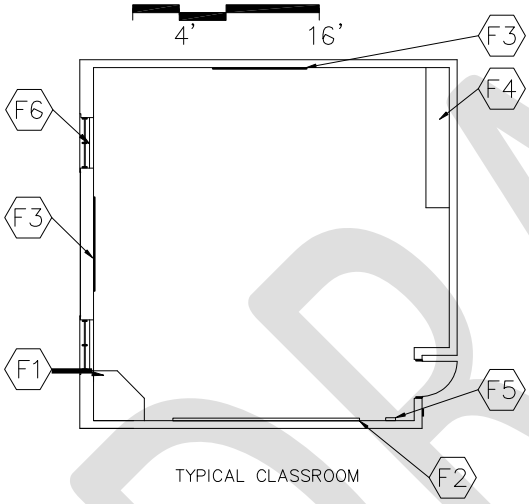

TYPICAL CLASSROOM

FEATURES:
Fixed Equipment:
F1 Tall wardrobe w/file drawers
F2 Chalk/marker board
F3 Tack board
F4 Base & wall cabinets
F5 Pencil sharpener support
F6 Windows with integral blinds

LOOSE FURNISHINGS:
Student desks and chairs
Computer workstation furniture
Teacher workstation/computer support and chair
File cabinet
Low bookcases (fixed or mobile)
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Optional: Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector
3. Miscellaneous: Operable partitions optional between classrooms

DRAFT

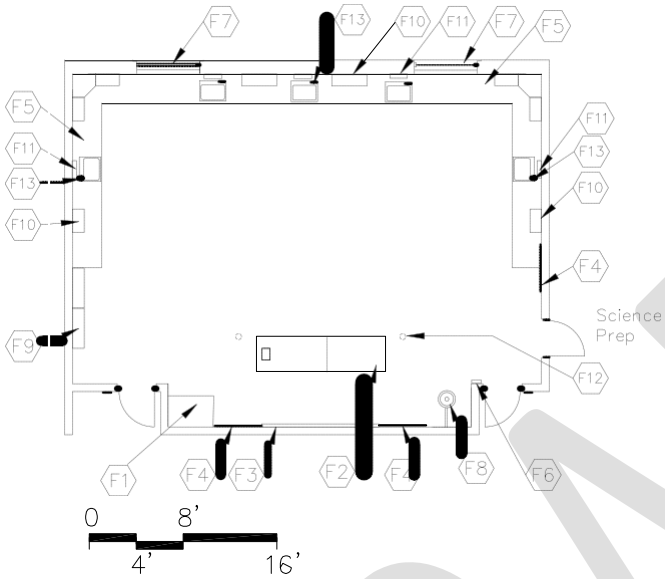

FEATURES:
Fixed Equipment:
F1 Tall wardrobe w/file drawers
F2 Demonstration table/teacher desk
F3 Chalk/marker board
F4 Tack board
F5 Perimeter sink base cabinets
F6 Pencil sharpener support
F7 Windows with integral blinds
F8 Emergency shower/eyewash
F9 Wall cabinets
F10 Wall cabinets, lockable
F11 Towel dispensers
F12 Eye hooks for demonstrations
F13 Soap dispensers

LOOSE FURNISHINGS:
Student work tables and stools/chairs
Computer workstation furniture
Teacher chair or stool
File cabinet
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Duplex receptacles at perimeter workstations and teaching wall; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector
3. Plumbing: Emergency shower/eyewash; gas, plumbing, and compressed air connections; master shutoff for gas; sinks

DRAFT

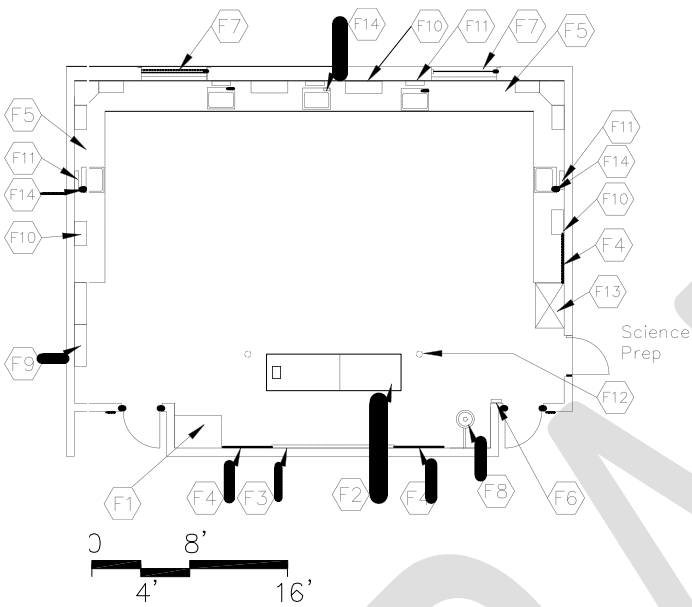

FEATURES:
Fixed Equipment:
F1 Tall wardrobe w/file drawers
F2 Demonstration table/teacher desk
F3 Chalk/marker board
F4 Tack board
F5 Perimeter sink base cabinets
F6 Pencil sharpener support
F7 Windows with integral blinds
F8 Emergency shower/eyewash
F9 Wall cabinets
F10 Wall cabinets, lockable
F11 Towel dispensers
F12 Eye hooks for demonstrations
F13 Fume hood
F14 Soap dispensers

LOOSE FURNISHINGS:
Student work tables and stools/chairs
Computer workstation furniture
Teacher chair or stool
File cabinet
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Duplex receptacles at perimeter workstations and teaching wall; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector
3. Plumbing: Emergency shower/eyewash; gas, plumbing, and compressed air connections; master shutoff for gas; sinks

DRAFT

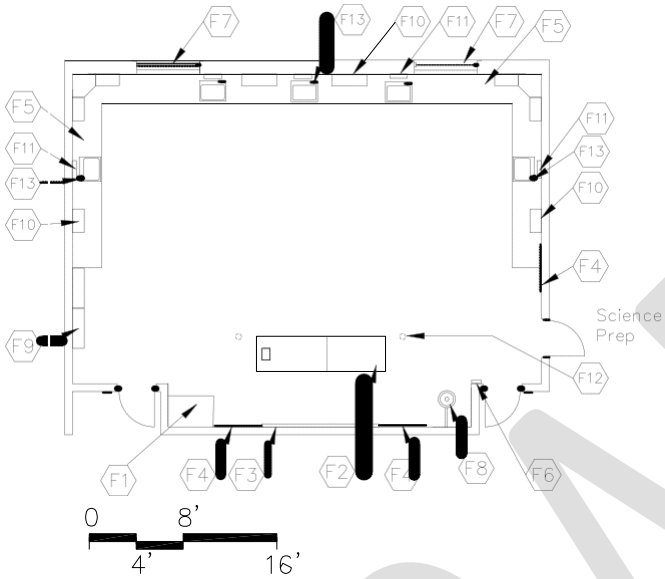

FEATURES:
Fixed Equipment:
F1 Tall wardrobe w/file drawers
F2 Demonstration table/teacher desk
F3 Chalk/marker board
F4 Tack board
F5 Perimeter sink base cabinets
F6 Pencil sharpener support
F7 Windows with integral blinds
F8 Emergency shower/eyewash
F9 Wall cabinets
F10 Wall cabinets, lockable
F11 Towel dispensers
F12 Eye hooks for demonstrations
F13 Soap dispensers

LOOSE FURNISHINGS:
Student work tables and stools/chairs
Computer workstation furniture
Teacher chair or stool
File cabinet
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Duplex receptacles at perimeter workstations and teaching wall; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector
3. Plumbing: Emergency shower/eyewash; gas, plumbing, and compressed air connections; master shutoff for gas; sinks

DRAFT

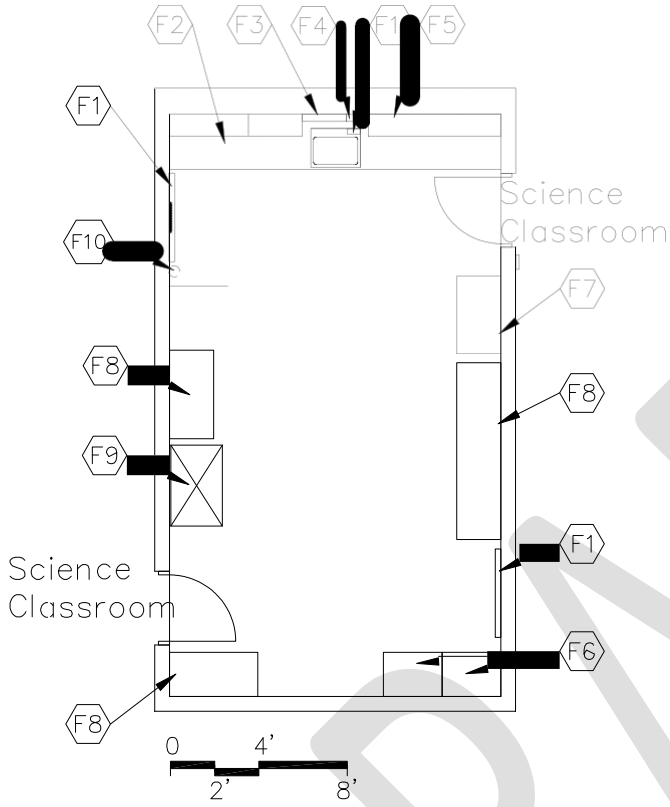

FEATURES:
Fixed Equipment:
F1 Tack board
F2 Lab station with sink
F3 Drying rack with pegs
F4 Towel dispenser
F5 Wall cabinets
F6 Storage cabinets for acid, ventilated
F7 Storage cabinets for flammables
F8 Tall storage cabinets
F9 Fume hood
F10 Emergency eyewash
F11 Soap dispenser

LOOSE FURNISHINGS:
Work table with chemical-resistant top
File cabinets
Refrigerator/freezer
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle under work table; ~~(3)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; clock
3. Plumbing: Emergency eyewash connection; gas, plumbing, and compressed air connections; acid waste system

DRAFT

HIGH TEACHER PREP AREA/WORKROOM

H-AC-6

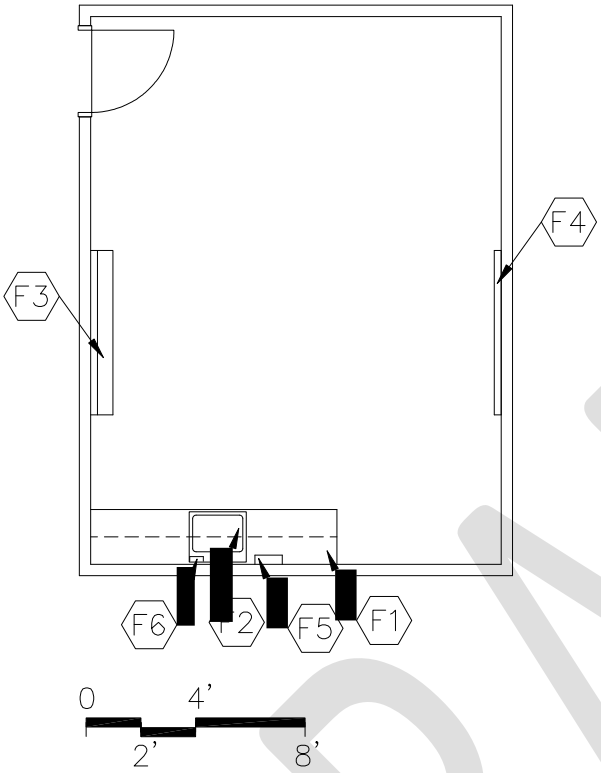

FEATURES:
Fixed Equipment:
F1 Base & wall cabinets
F2 Sink base cabinet
F3 Chalk/marker board
F4 Tack board
F5 Towel dispenser
F6 Soap dispenser

LOOSE FURNISHINGS:
Tables and chairs
Computer workstation furniture
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ video port, voice port & phone; clock; ~~(2)~~ data ports
3. Plumbing: Sink

DRAFT

HIGH
INDIVIDUAL RESTROOM
H-AC-7

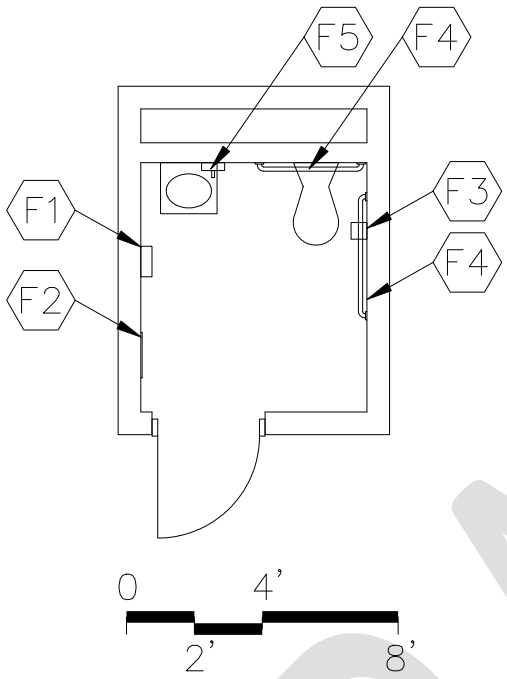

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24" x 60" mirror
F3 Toilet tissue holder
F4 36" and 42" grab bar
F5 Soap dispenser

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient
Optional: ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Resilient base (optional: CMT, PT, or TER)
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory~~; floor drain~~
2. Electrical: Single-level switching; ~~no~~ receptacles

DRAFT

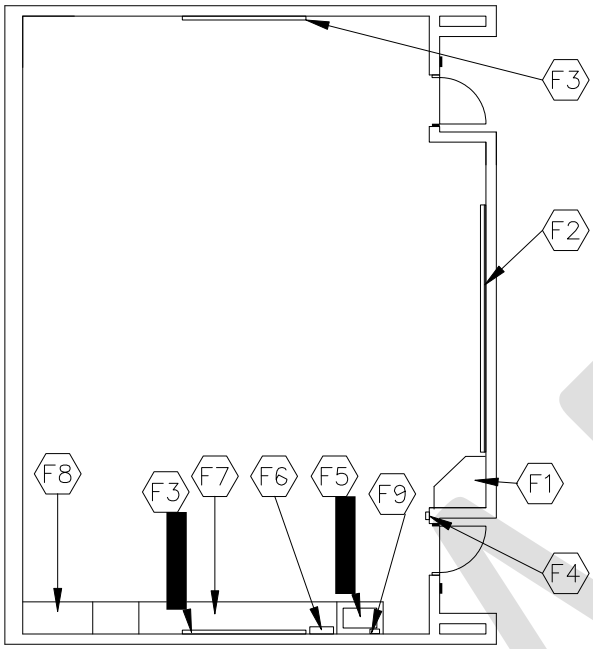

FEATURES:
Fixed Equipment:
F1 Tall wardrobe w/file drawers
F2 Chalk/marker board
F3 Tack board
F4 Pencil sharpener support
F5 Sink base cabinet
F6 Towel dispenser
F7 Base cabinets
F8 Tall storage cabinets
F9 Soap dispenser

LOOSE FURNISHINGS:
Student chairs
Work tables
Computer workstation furniture
Teacher workstation/computer support and chair
File cabinet
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Optional: Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; classroom area network (13 ports minimum); clock; overhead projector
3. Miscellaneous: Classroom area network file server; printer
4. Plumbing: Sink

DRAFT

HIGH
SMALL GROUP ROOM
H-AC-9

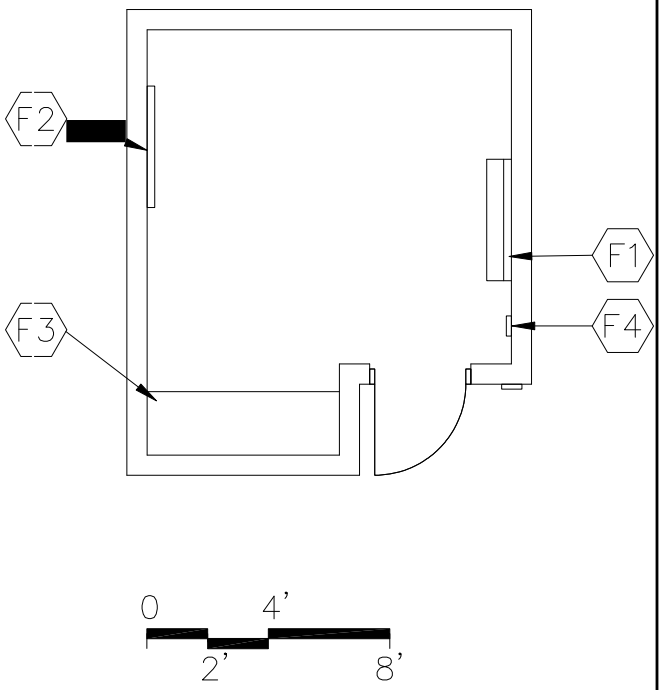

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 Work surface
F4 Pencil sharpener support

LOOSE FURNISHINGS:
Work tables and chairs
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Optional: Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port; clock

HIGH INSTRUCTIONAL MATERIAL STORAGE

H-AC-10

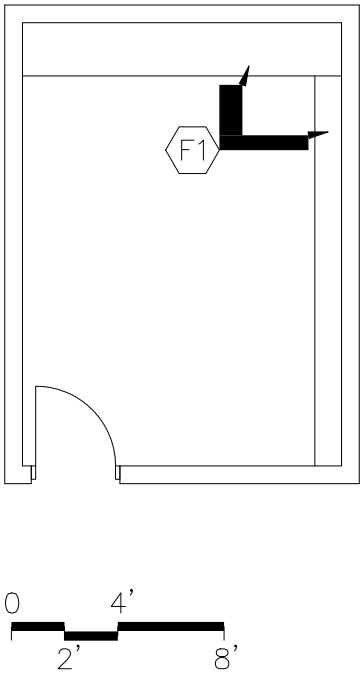

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
N/A

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

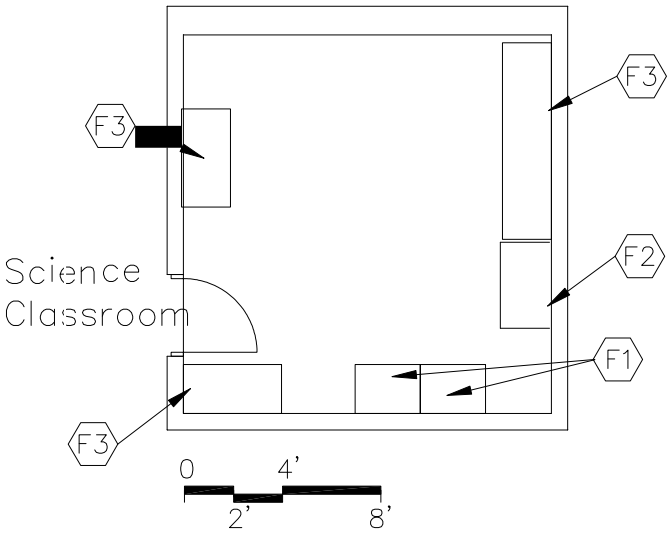

FEATURES:
Fixed Equipment:
F1 Storage cabinets for acid, ventilated
F2 Storage cabinets for flammables
F3 Tall storage cabinets

LOOSE FURNISHINGS:
Refrigerator/freezer

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle on each wall; single-level switching

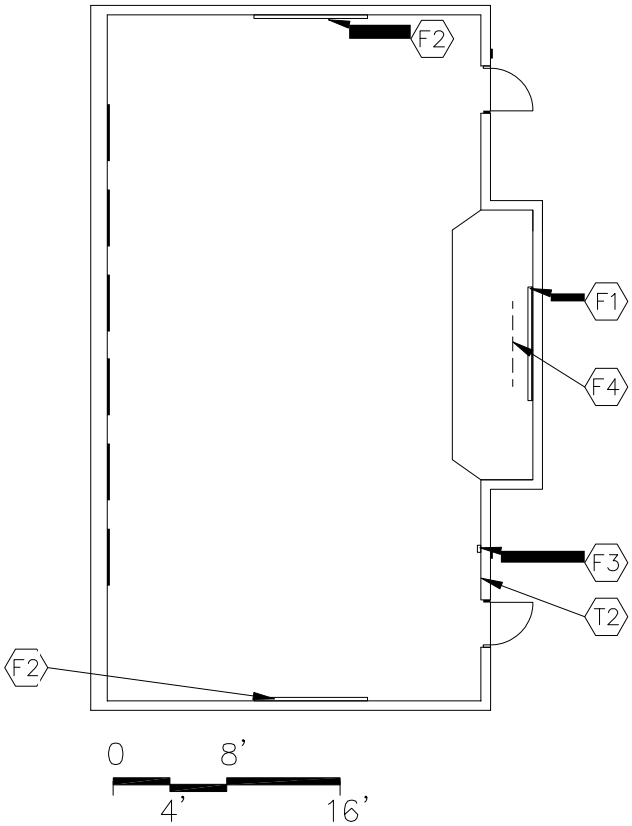

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 Pencil sharpener support
F4 Projection screen

LOOSE FURNISHINGS:
Student desks and chairs
Podium
Portable risers
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units;
Acoustical wall treatment

NOTES:

1. Electrical: ~~(6)~~ duplex receptacles; multi-level switching; telecommunications grounding
2. Technology: ~~(1) each~~ data port, voice port & phone, port to input local computer to monitor; ~~(2)~~ video ports; clock; overhead projector

Instructional and activity areas shall be accessible by corridors without passing through another instructional or activity area.

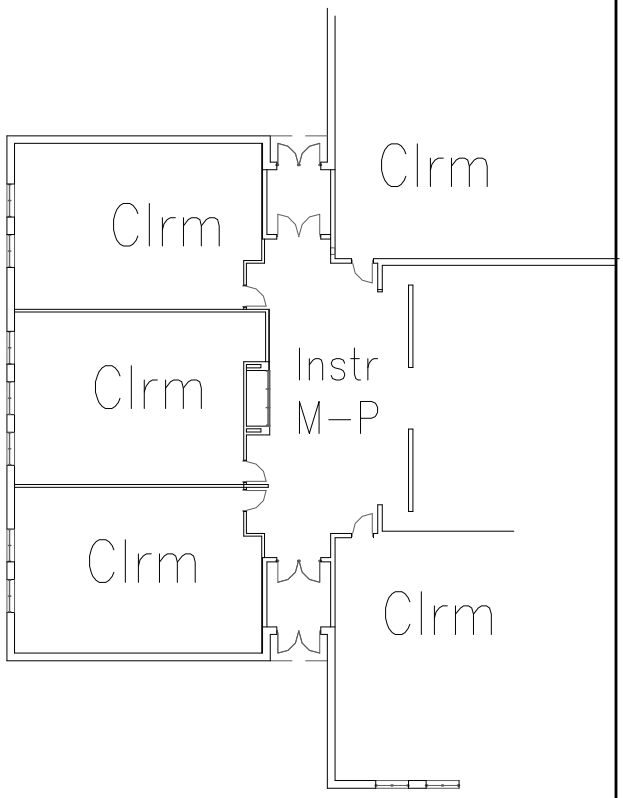

FEATURES:
Fixed Equipment:
NA

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Resilient, porcelain tile, or terrazzo

Base:
Resilient, porcelain tile, or terrazzo base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Duplex receptacles; dual-level switching
2. Technology: Wireless access points; video ports; data ports

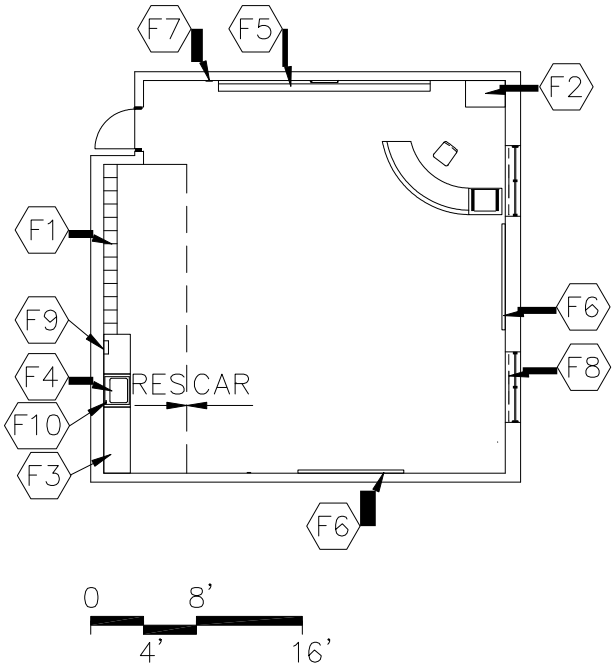

FEATURES:
Fixed Equipment:
F1 Open casework – coats with wall cabinets above
F2 Tall wardrobe w/file drawers
F3 Base and wall cabinets
F4 Sink base cabinet
F5 Chalk/marker board
F6 Tack board
F7 Pencil sharpener support
F8 Windows with integral blinds
F9 Towel dispenser
F10 Soap dispenser

LOOSE FURNISHINGS:
Student desks/tables
Student chairs
Teacher workstation/computer support and chair
Computer workstation furniture
File cabinet
Low bookcases (fixed or mobile)
Reading table
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Resilient
4' width in front of cabinets or
Optional: All resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector
3. Plumbing: Sink with drinking fountain

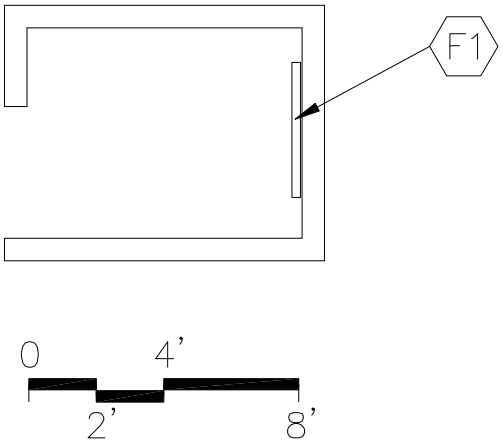

FEATURES:
Fixed Equipment:
F1 Tack board

LOOSE FURNISHINGS:
Student desk and chair
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; dimmable lighting
2. Technology: Clock

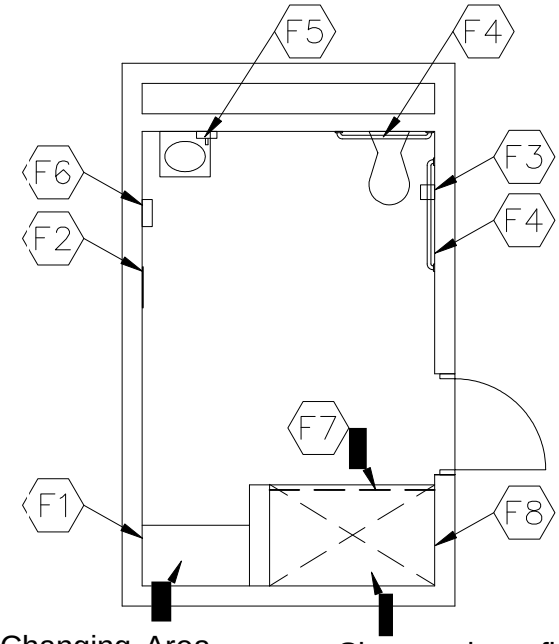

Changing Area.
Storage of supplies for health needs.

Shower-slope floor; no raised threshhold; 4' x 5' for two people



FEATURES:
Fixed Equipment:
F1 Base cabinet
F2 24” x 60” mirror
F3 Toilet tissue holder
F4 36” and 42” grab bar
F5 Soap dispenser
F6 Towel dispenser
F7 Shower curtain and rod
F8 ADA shower accessories

LOOSE FURNISHINGS:
Wastebasket

FINISHES:

Flooring:
Restroom - Resilient
Shower - Ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Restroom - Resilient base
Shower - Ceramic mosaic tile, porcelain tile, or terrazzo

Ceiling:
Restroom - Suspended, acoustical
Shower - Painted Portland cement plaster or interior finish system

Walls:
Epoxy painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory; ADA shower controls and head; floor drain
2. Electrical: ~~(1)~~ duplex receptacle; single-level switching

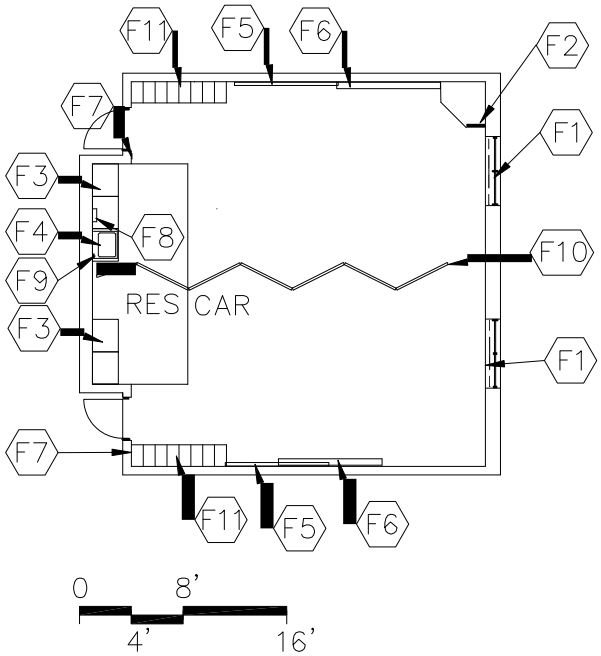

FEATURES:
Fixed Equipment:
F1 Windows with integral blinds
F2 Tall wardrobe w/file drawers
F3 Base cabinets
F4 Sink base cabinet
F5 Chalk/marker board
F6 Tack board
F7 Pencil sharpener support
F8 Towel dispenser
F9 Soap dispenser
F10 Operable partition
F11 Open casework-coats with wall cabinets above

LOOSE FURNISHINGS:
Student desks/tables
Computer workstation furniture
Student chairs
Teacher desk or workstation/computer support and chair
File cabinet
Mobile bookcases or storage unit
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Resilient
4' width in front of cabinets

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: Sink
2. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
3. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector

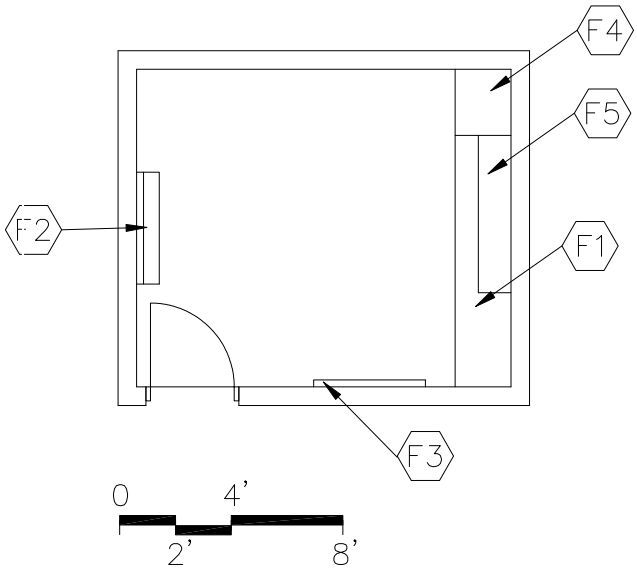

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Small table with chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

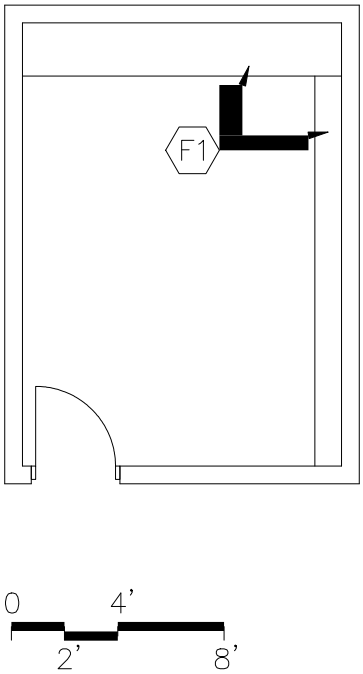

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
N/A

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

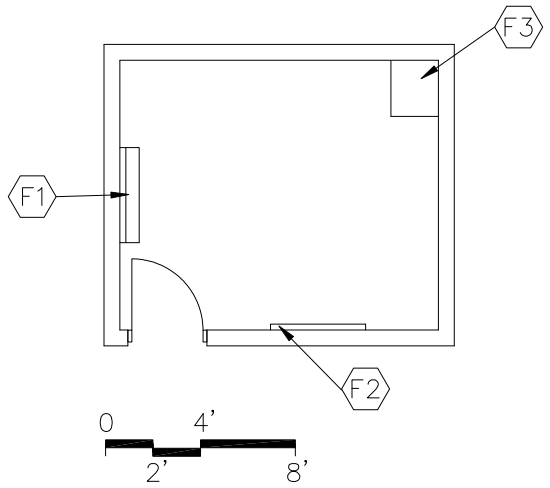

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 Wall cabinets

LOOSE FURNISHINGS:
Chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

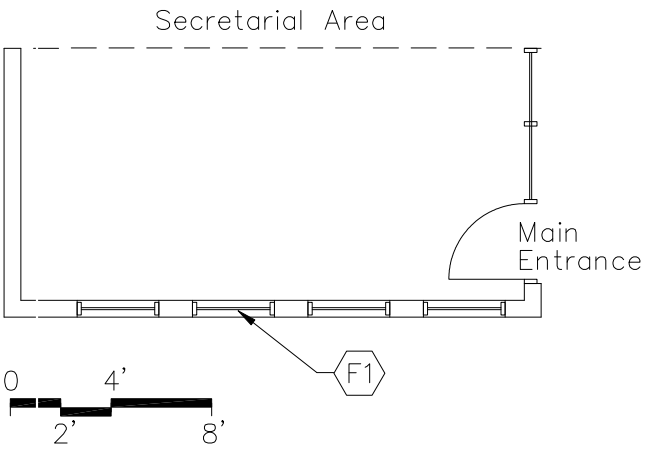

FEATURES:
Fixed Equipment:
F1 Interior windows

LOOSE FURNISHINGS:
Visitor chairs
End table
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ video port, voice port & phone; clock

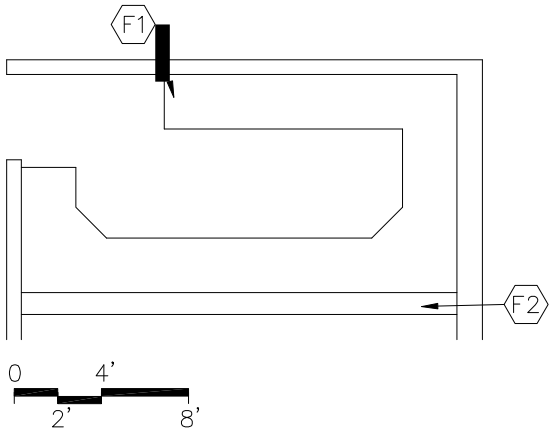

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 High counter top

LOOSE FURNISHINGS:
Secretarial chair(s)
Wastebasket(s)

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, voice port & phone at each secretarial station; ~~(1)~~ fax port, ~~(1)~~ data port for printer; clock
3. Miscellaneous: ~~(1) each~~ fax machine; printer; computer/typewriter

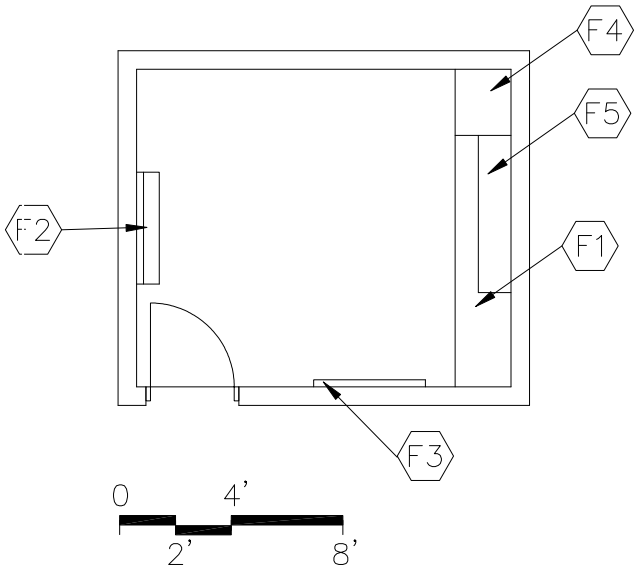

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket(s)

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

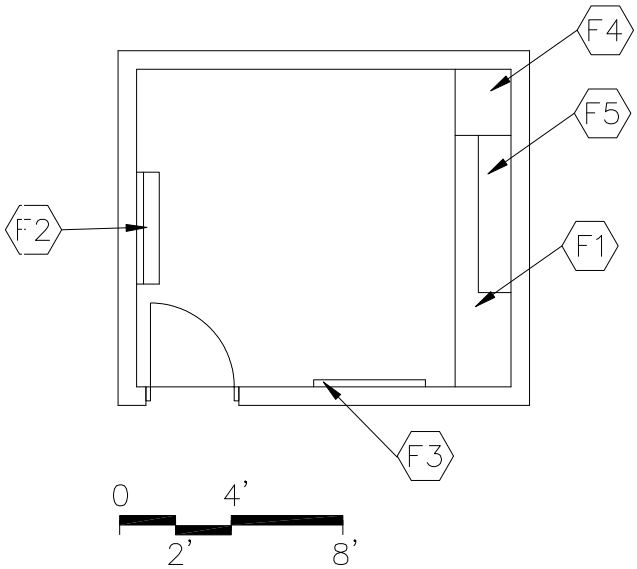

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket(s)

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

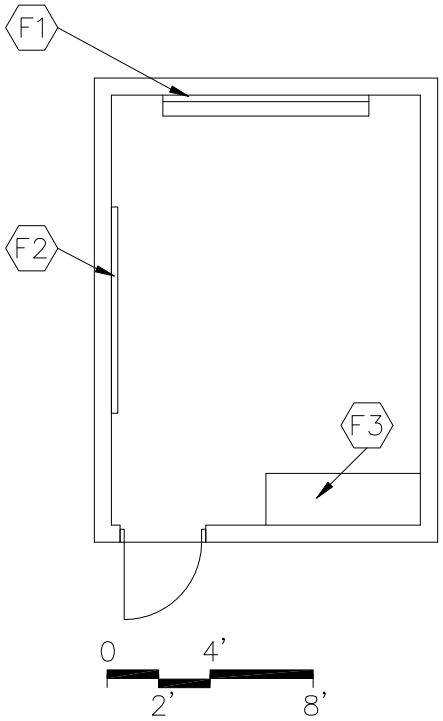

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 Base cabinets

LOOSE FURNISHINGS:
Conference table
Chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ data port, voice port & phone, video port and video display device; clock

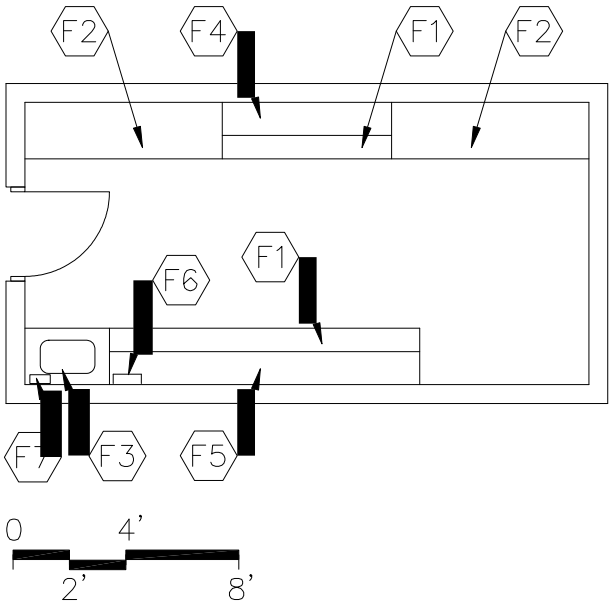

FEATURES: Fixed
Equipment: F1
Base cabinets
F2 Tall storage cabinets
F3 Sink base cabinet
F4 Mail cubicles
F5 Wall cabinets
F6 Towel dispenser
F7 Soap dispenser

LOOSE FURNISHINGS:
Worktable
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard over metal studs

NOTES:

1. Electrical: ~~(3)-(5)~~ duplex receptacles; single-level switching; receptacle for copier
2. Technology: ~~(1)~~ voice port & phone; clock
3. Plumbing: Sink
4. Miscellaneous: Copier

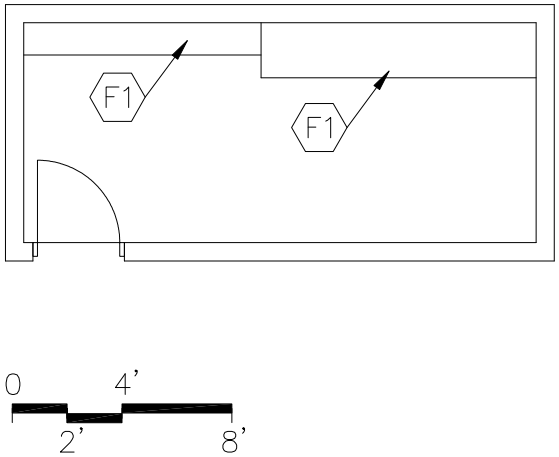

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
File cabinets

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

HIGH
VAULT / RECORDS STORAGE
H-AD-8

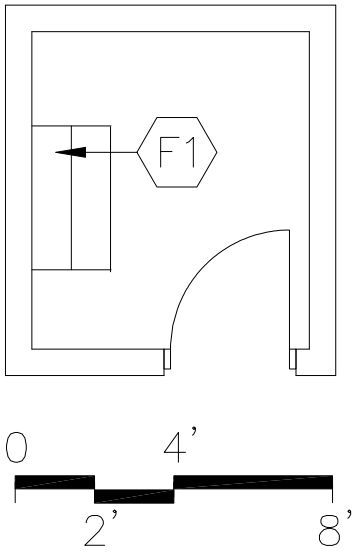

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
File cabinet
Safe

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Rated 2-hour construction
Walls:
Painted concrete masonry units;
Rated 2-hour construction

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

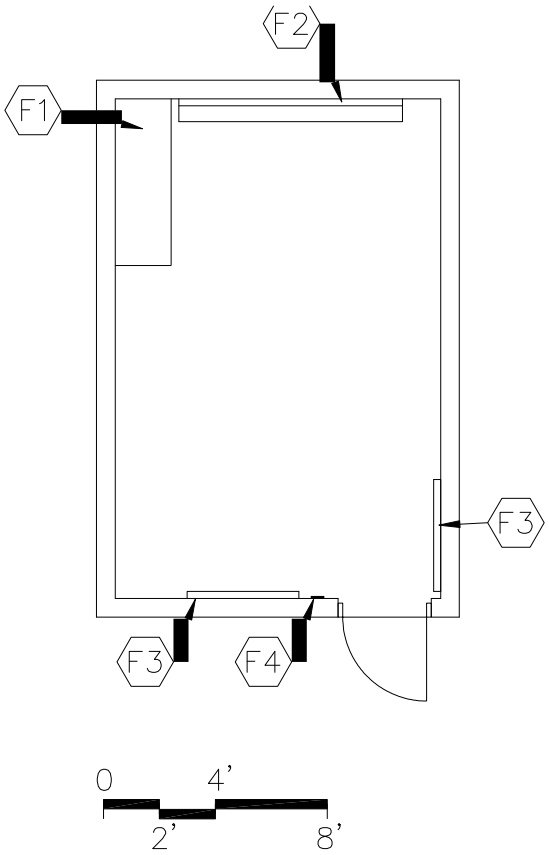

FEATURES:
Fixed Equipment:
F1 Base cabinets
F2 Chalk/marker board
F3 Tack board
F4 Pencil sharpener support

LOOSE FURNISHINGS:
Student carrels and/or desks
Student chairs
Teacher desk and chair
Computer workstation furniture
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(2)~~ data ports for students; clock

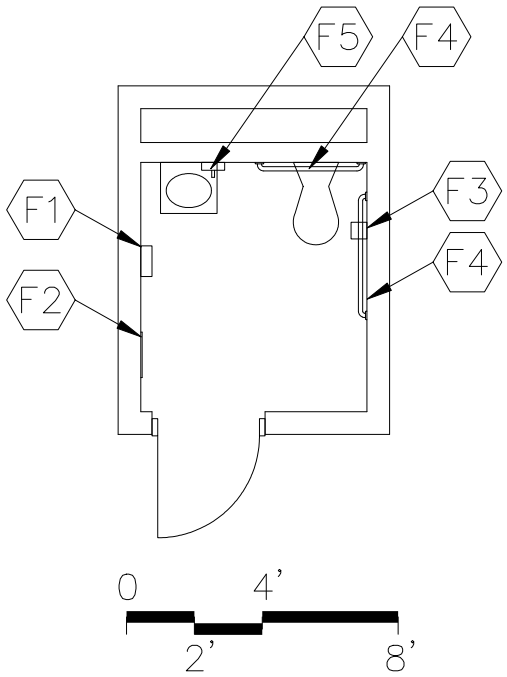

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24" x 60" mirror
F3 Toilet tissue holder
F4 36" and 42" grab bar
F5 Soap dispenser

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient
TER)
Optional: ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Resilient base (optional: CMT, PT, or

Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory~~; floor drain~~
2. Electrical: ~~(1)~~ duplex receptacle; single-level switching

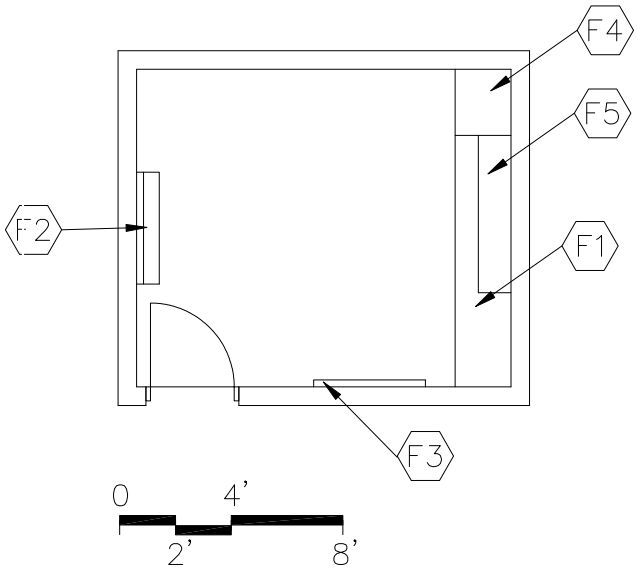

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1)~~ each data port, video port, voice port & phone; clock

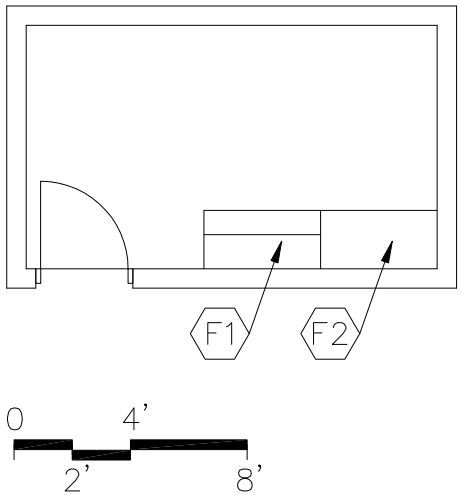

FEATURES:
Fixed Equipment:
F1 Base and wall cabinets
F2 Tall storage cabinets

LOOSE FURNISHINGS:
File cabinets

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Rated 2-hour construction
Walls:
Painted gypsum wallboard over metal studs; Rated 2 hour construction

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

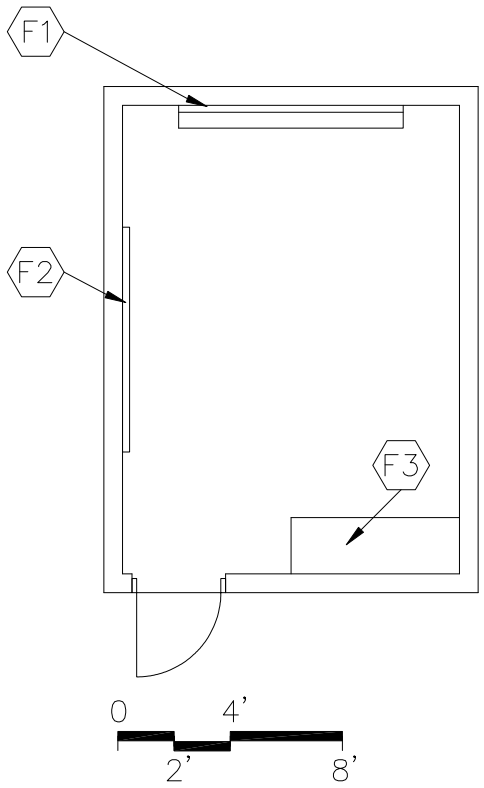

F1 Chalk/marker board
F2 Tack board
F3 Base cabinets

LOOSE FURNISHINGS:
Conference table
Chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; multi-level switching
2. Technology~~: (1) each~~ video port and video display device, voice port & phone; data port; clock

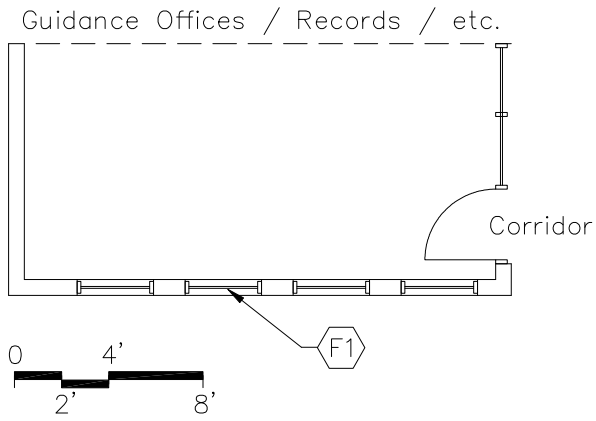

FEATURES:
Fixed Equipment:
F1 Interior windows

LOOSE FURNISHINGS:
Visitor chairs
End table
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ video port, voice port & phone; clock

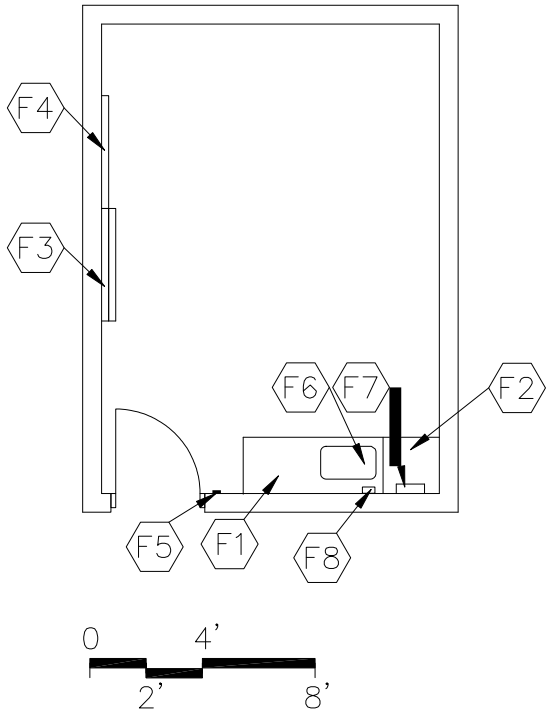

FEATURES:
Fixed Equipment:
F1 Base cabinets
F2 Tall wardrobe
F3 Chalk/marker board
F4 Tack board
F5 Pencil sharpener support
F6 Sink base cabinet
F7 Towel dispenser
F8 Soap dispenser

LOOSE FURNISHINGS:
Tables and chairs
Computer workstation furniture
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ video port, video display device, voice port & phone; data port; clock
3. Plumbing: Sink

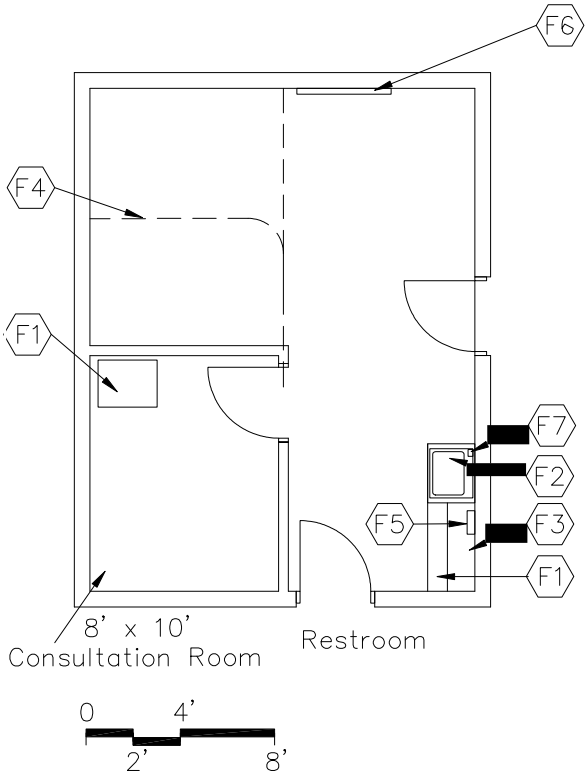

FEATURES:
Fixed Equipment:
F1 Base cabinets
F2 Sink base cabinet
F3 Wall cabinets; lockable
F4 Cubicle curtain and track
F5 Towel dispenser
F6 Tack board
F7 Soap dispenser

LOOSE FURNISHINGS:
Cots
Refrigerator with ice making capabilities
Desk and chair
Chairs Stool
Wastebasket

FINISHES:
Flooring:
Seamless sheet vinyl

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard over metal studs

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching; receptacle for refrigerator
2. Technology: ~~(1) each~~ voice port & phone; data port; clock

3. Plumbing: Sink
4. Restroom must be located adjacent to health clinic.

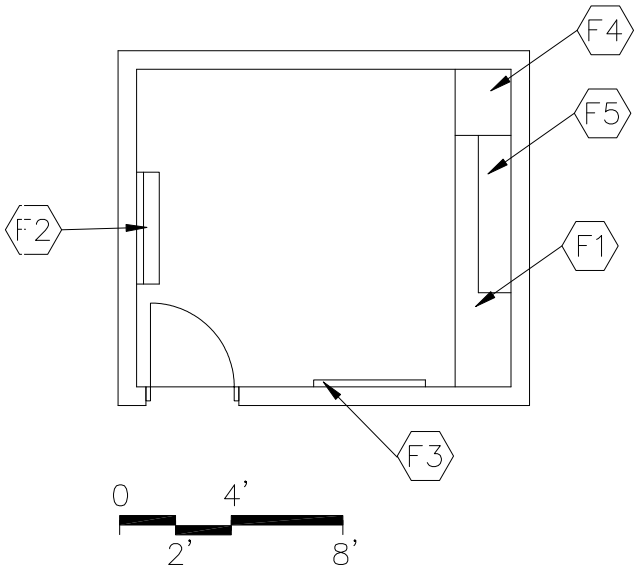

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket(s)

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

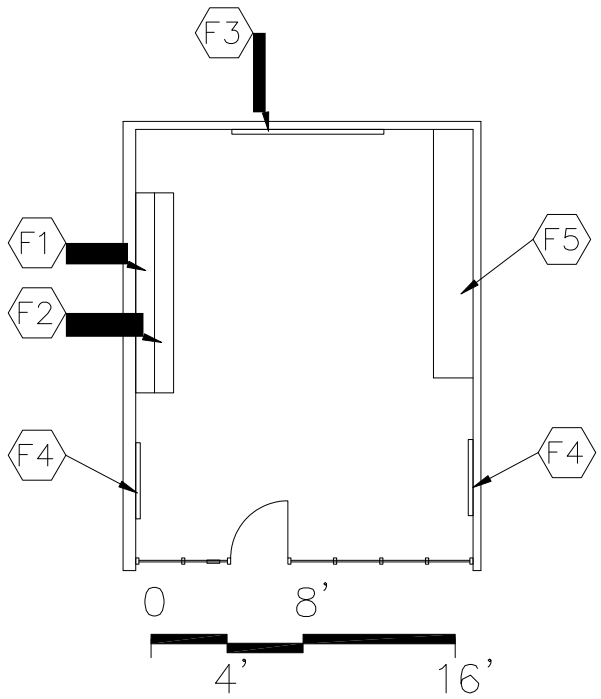

FEATURES:
Fixed Equipment:
F1 Display cabinets
F2 Base cabinets
F3 Chalk/marker board
F4 Tack board
F5 Workstation

LOOSE FURNISHINGS:
Work tables and chairs
Workstations
Reading chairs
Small table
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port and video display device, voice port, clock; ~~(4)~~ data ports at workstations

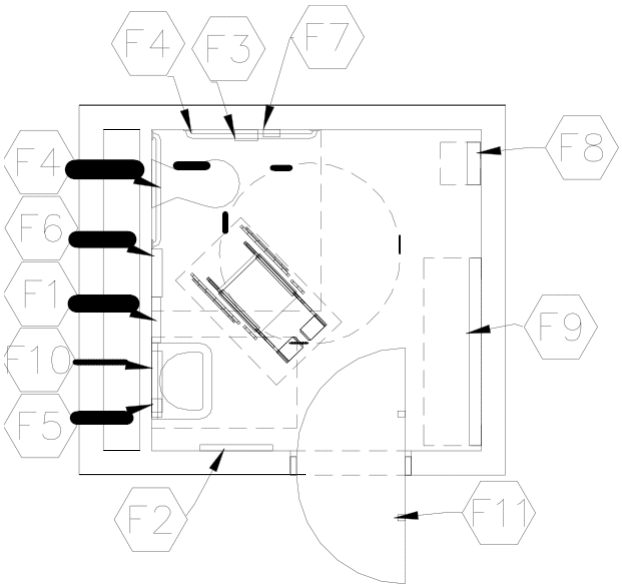

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24” x 60” mirror
F3 Toilet tissue holder
F4 36” and 42” grab bar
F5 Soap dispenser
F6 Sanitary napkin dispenser/disposal
F7 Folding utility shelf
F8 Mounted child seat
F9 Adult/child changing station
F10 16” x 24” mirror with shelf
F11 Coat hooks

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient
TER)
Optional: ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Resilient base (optional: CMT, PT, or

Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory; floor drain
2. Electrical: ~~(1)~~ duplex receptacle; single-level switching

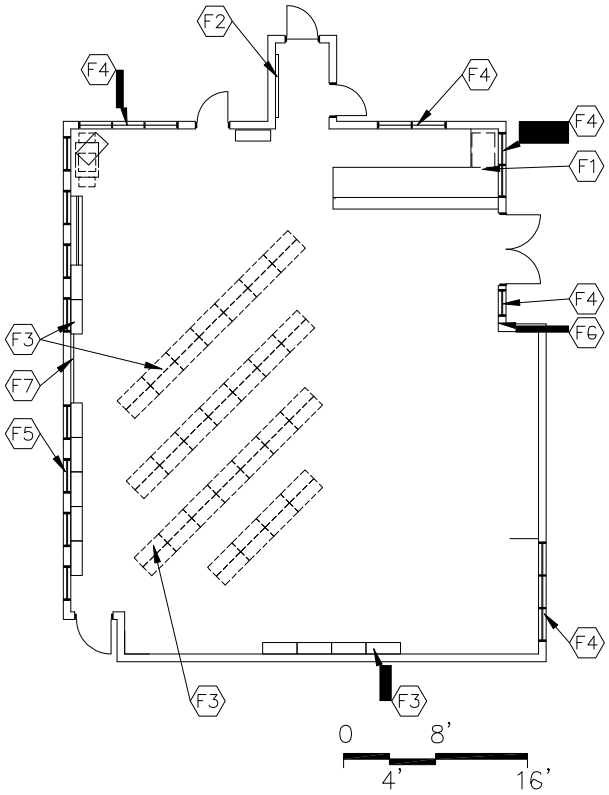

FEATURES:
Fixed Equipment:
F1 Circulation desk casework
F2 Tack board
F3 Library book shelving
F4 Interior windows
F5 Windows with integral blinds
F6 Pencil sharpener support
F7 Chalk/marker board

LOOSE FURNISHINGS:
Student tables and chairs
Computer workstation furniture
Circulation desk task chair
Dictionary stand
Atlas stand
Paperback book rack
Lateral file
Mobile book carts
Magazine display
Newspaper rack
Study carrels
Desk height filing cabinets
Casual seating chairs
Wastebaskets
Pencil sharpener

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(10)~~ duplex receptacles; multi-level switching
2. Technology: ~~(2)~~ video ports and video display devices, ~~(1)~~ voice port & phone; ~~(4)~~ data ports for students; ~~(2)~~ data ports for library automation system; clock
3. Miscellaneous: ~~(2)~~ printers – one at circulation desk and one in student work area

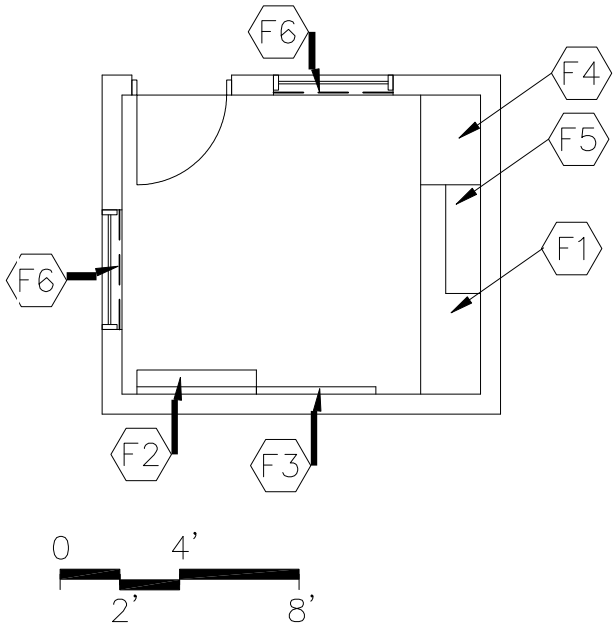

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets
F6 Interior window

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
File cabinet
Wastebasket(s)

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

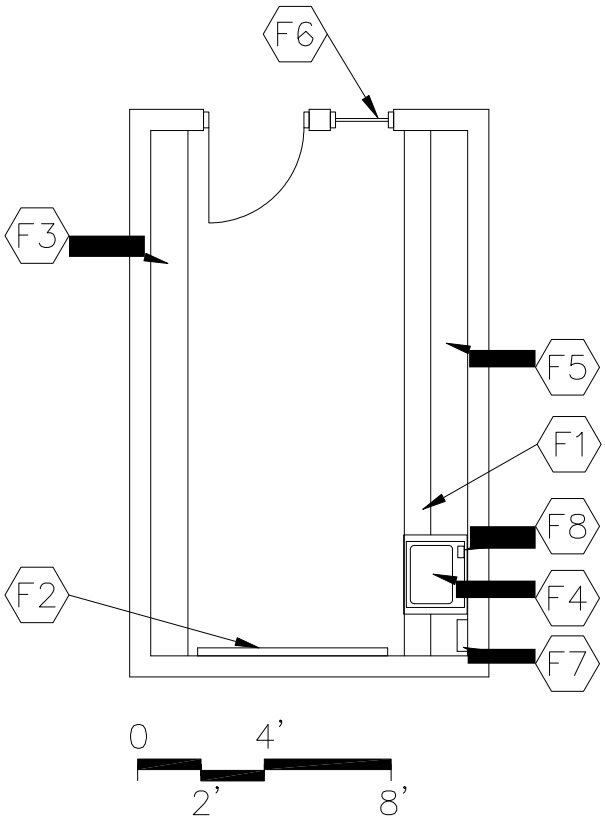

FEATURES: Fixed
Equipment: F1
Base cabinets
F2 Tack board
F3 Bookcases
F4 Sink base cabinet
F5 Wall cabinets F6
Interior window
F7 Towel dispenser
F8 Soap dispenser

LOOSE FURNISHINGS:
Tables and chairs
Book trucks
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, voice port & phone; clock
3. Plumbing: Sink

HIGH
A/V STORAGE
H-MC-4

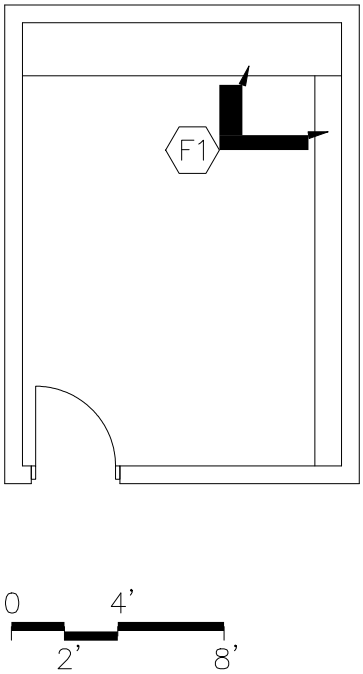

FEATURES:
Fixed Equipment:
F1 Tall shelving

LOOSE FURNISHINGS:
Desk and chair
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, voice port and phone

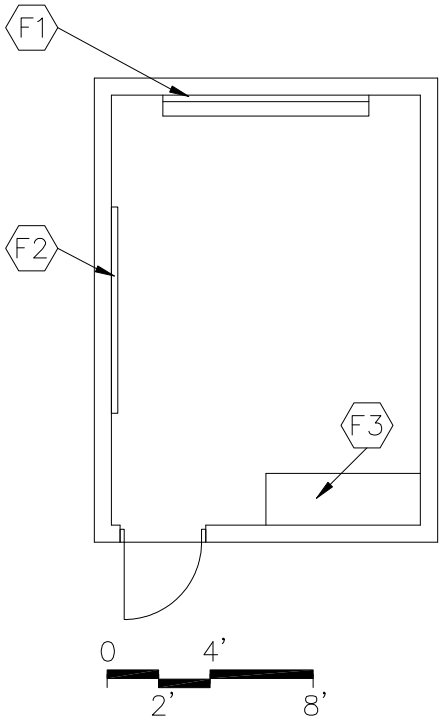

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 Base cabinets

LOOSE FURNISHINGS:
Conference table
Chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ data port, voice port & phone, video port and video display device; clock

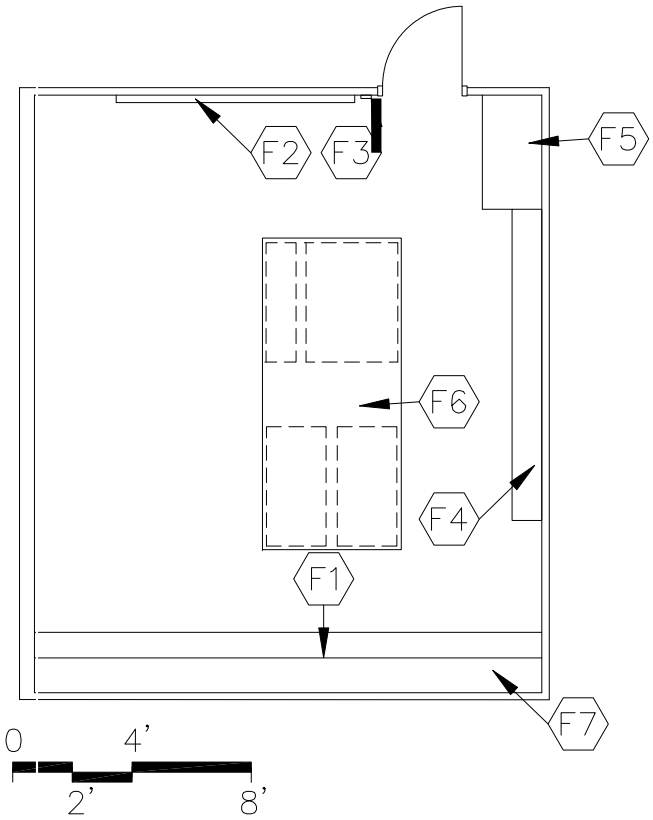

FEATURES:
Fixed Equipment:
F1 Base cabinets with file drawers
F2 Tack board
F3 Pencil sharpener support
F4 Tall bookcases
F5 Tall cabinets
F6 Work surface with base cabinets below
F7 Wall cabinets

LOOSE FURNISHINGS:
Tables and chairs/stools
Computer workstation furniture
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1)~~ video port and video display device, ~~(1)~~ voice port & phone; ~~(4)~~ data ports for students; clock

HIGH
DOCUMENT STORAGE
H-MC-7

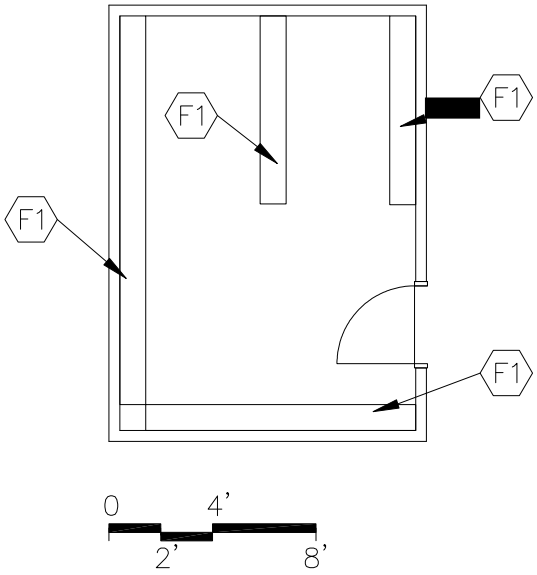

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
N/A

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching

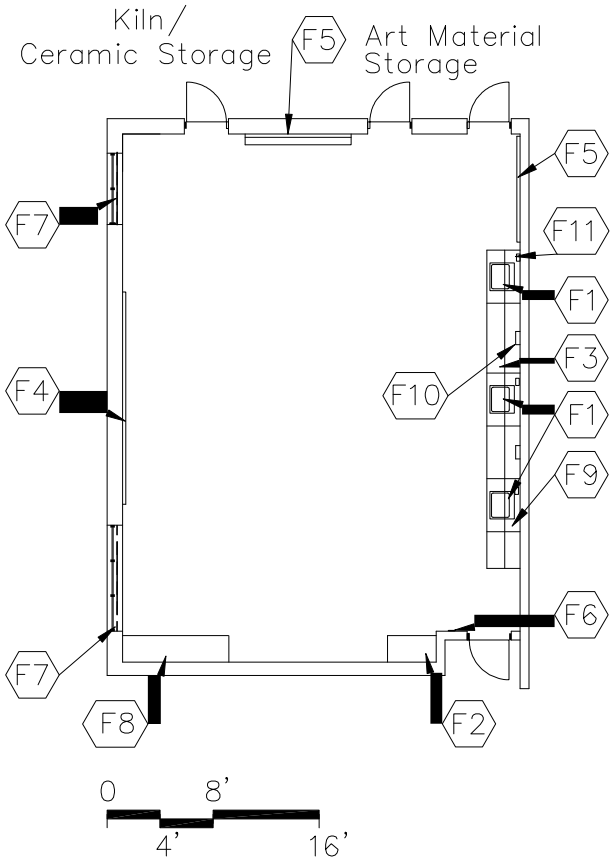

FEATURES:
Fixed Equipment:
F1 Sink base cabinet, 30" deep
F2 Tall wardrobe w/file drawers
F3 Base cabinets, 30" deep
F4 Tack board
F5 Chalk/marker board
F6 Pencil sharpener support
F7 Windows with integral blinds
F8 Tall storage cabinets with pull out shelves
F9 Wall cabinets
F10 Towel dispensers
F11 Soap dispensers

LOOSE FURNISHINGS:
Student worktables
Student chairs or stools
Teacher workstation/computer support and chair
Computer workstation furniture
Drying rack
Desk height file cabinet
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Resilient or sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; multi-level switching; track lighting
2. Technology: ~~(1) each~~ video port, data port, voice port & phone; ~~(4)~~ data ports for students; clock; overhead projector
3. Plumbing: Sinks with solids interceptor
4. HVAC: Manually operated exhaust air system

HIGH
KILN / CERAMIC STORAGE
H-VA-2

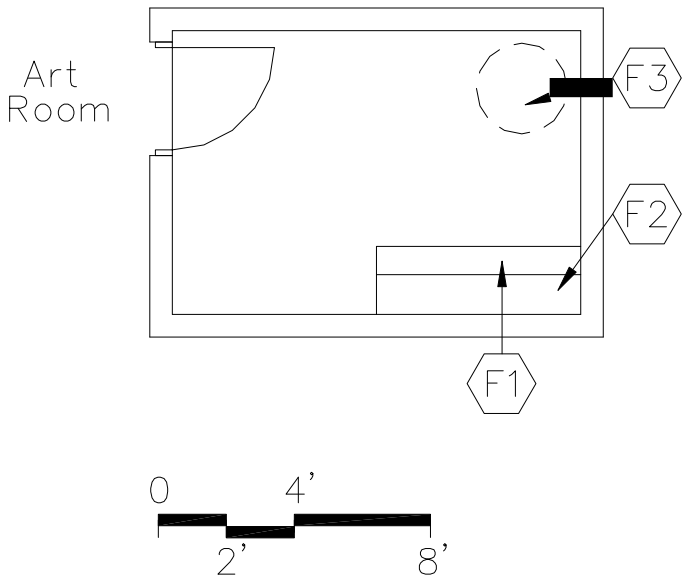

FEATURES:
Fixed Equipment:
F1 Base cabinets
F2 Wall cabinets
F3 Kiln

LOOSE FURNISHINGS:
Tall dry storage units
Tall damp storage units

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units;

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching; electrical connection for kiln
2. HVAC: Temperature controlled exhaust; ventilation for kiln

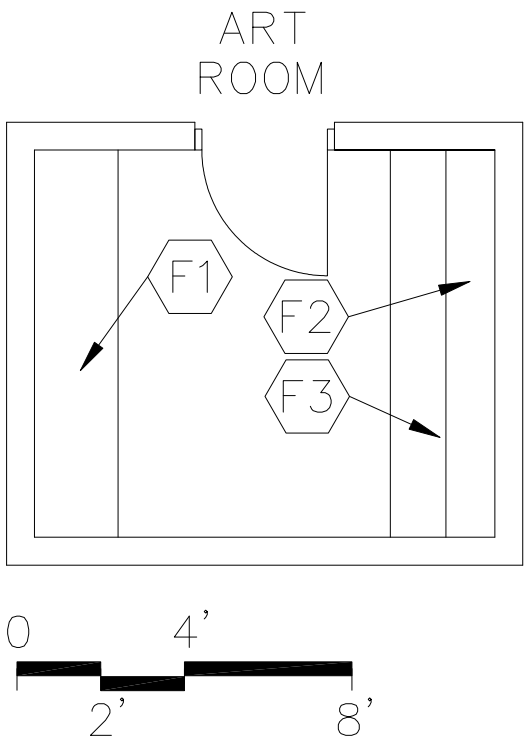

FEATURES:
Fixed Equipment:
F1 Tall storage cabinets
F2 Base cabinets, 30" deep
F3 Wall cabinets, 12" deep

LOOSE FURNISHINGS:
Mobile materials cart

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

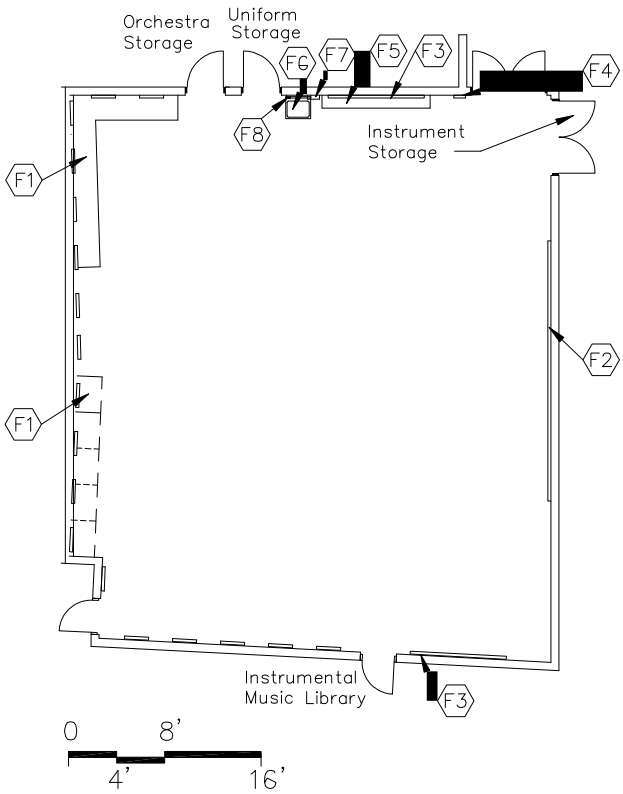

FEATURES: Fixed
Equipment: F1
Base cabinets
F2 Chalk/marker board with staff lines
F3 Tack board
F4 Pencil sharpener support
F5 Bookcases
F6 Sink base cabinet
F7 Towel dispenser
F8 Soap dispenser

LOOSE FURNISHINGS:
Conducting podium
Mobile percussion instrument storage cabinet
Computer workstation furniture
Mobile sheet music cabinet
Music chairs
Music stands
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Optional: Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units
Acoustical wall treatment

NOTES:

1. Electrical: ~~(6)~~ duplex receptacles; multi-level switching; telecommunications grounding
2. Technology: ~~(2)~~ video ports, ~~(1)~~voice port & phone; ~~(1)~~ data port; ~~(4)~~ data ports for students; clock; overhead projector
3. Plumbing: Drinking water cooler; 10" deep sink
4. Miscellaneous: Piano; doors to have acoustic trim accessories

HIGH
INSTRUMENT STORAGE
H-MU-2

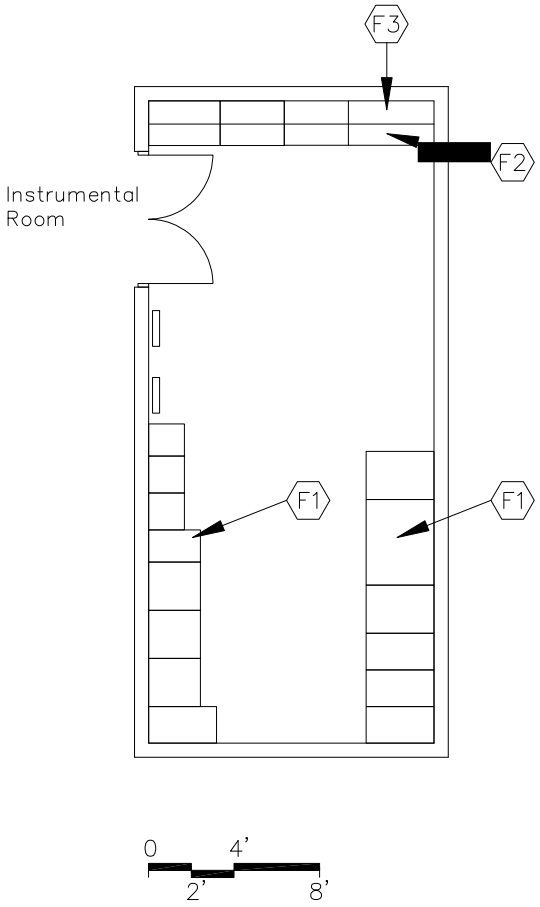

FEATURES:
Fixed Equipment:
F1 Miscellaneous instrument storage cabinets
F2 Base cabinets
F3 Wall cabinets

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

HIGH
INSTRUMENT REPAIR ROOM
H-MU-3

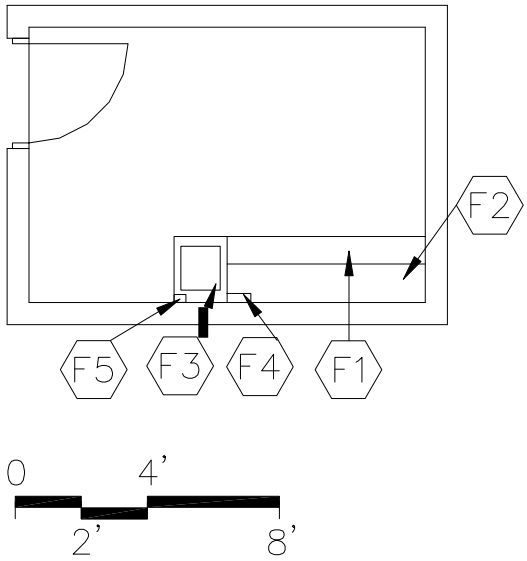

FEATURES:
Fixed Equipment:
F1 Base cabinet
F2 Wall cabinet
F3 Sink base cabinet
F4 Towel dispenser
F5 Soap dispenser

LOOSE FURNISHINGS:
Storage units
Wastebasket
Table and chairs

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching
2. Plumbing: Sink; plumbing connections

HIGH
ORCHESTRA STORAGE
H-MU-4

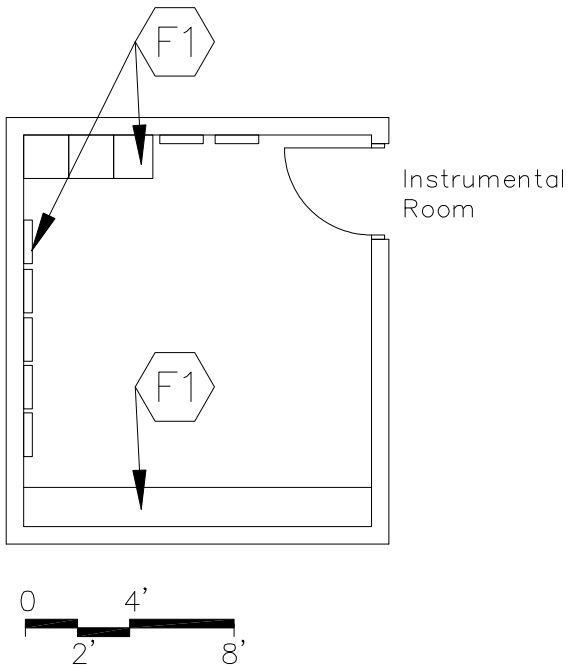

FEATURES:
Fixed Equipment:
F1 Miscellaneous instrument storage cabinets

LOOSE FURNISHINGS:
Carts for large instruments

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

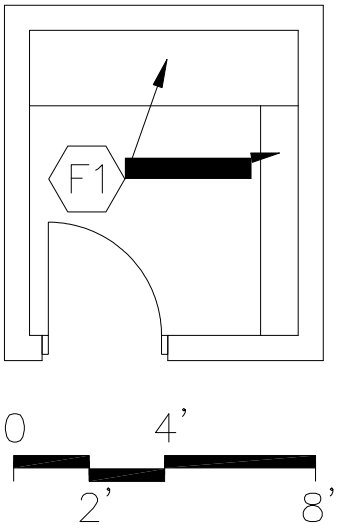

FEATURES:
Fixed Equipment:
F1 Base and wall cabinets

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs or
Painted concrete masonry units

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching

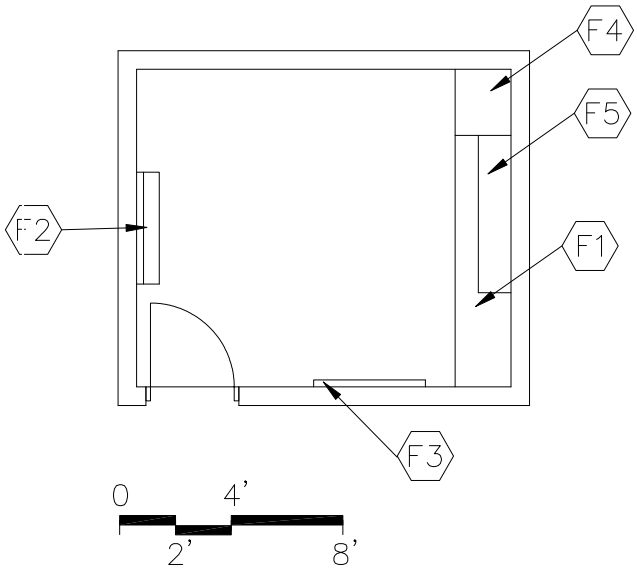

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard over metal studs

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

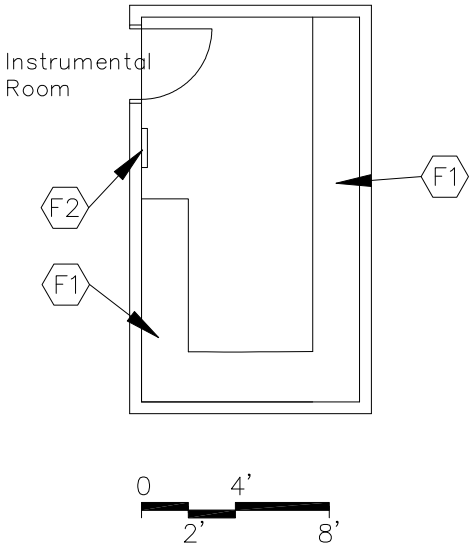

FEATURES:
Fixed Equipment:
F1 High uniform storage cabinets
F2 Mirror

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

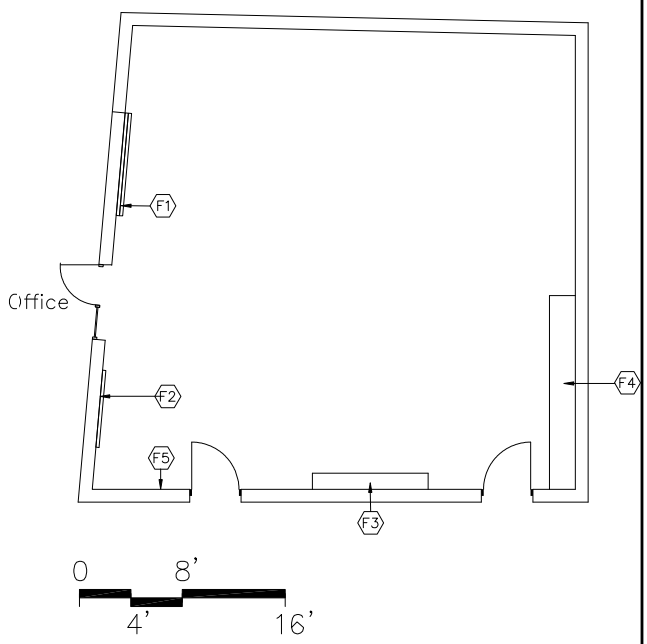

FEATURES:
Fixed Equipment:
F1 30' x 5' mirror mounted 12" above floor
F2 Chalk/marker board with staff lines
F3 Tack board
F4 Pencil sharpener support
F5 Base cabinets
F6 Tall storage cabinet
F7 Wall cabinets

LOOSE FURNISHINGS:
Conducting podium
Computer workstation furniture
Mobile sheet music cabinet
Music chairs
Portable risers
Wastebasket
Pencil sharpener

FINISHES:
Flooring:
Carpet
Optional: Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units
Acoustical wall treatment (optional)

NOTES:

1. Electrical: ~~(6)~~ duplex receptacles; multi-level switching; telecommunications grounding
2. Technology: ~~(2)~~ video ports; ~~(1)~~ voice port & phone; ~~(1)~~ data port; ~~(4)~~ data ports for students; clock; overhead projector
3. Miscellaneous: Piano

HIGH
VOCAL STORAGE
H-MU-9

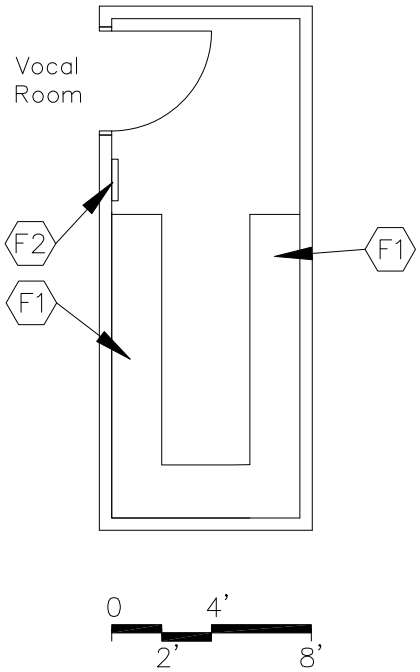

FEATURES:
Fixed Equipment:
F1 High robe storage cabinets
F2 Mirror

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching
2. Miscellaneous: Space for storage of portable risers

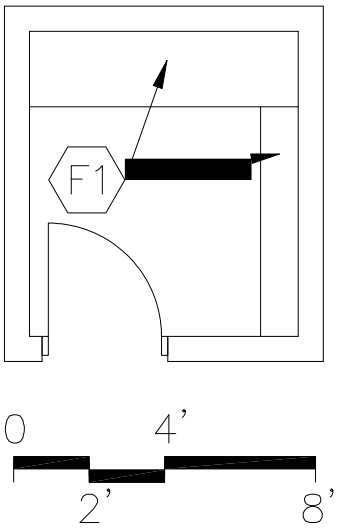

FEATURES:
Fixed Equipment:
F1 Base and wall cabinets

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching

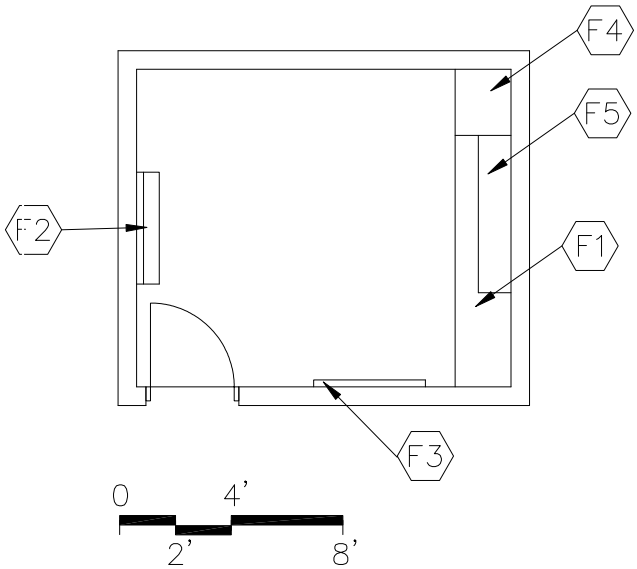

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs or
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

HIGH
ENSEMBLE ROOM
H-MU-12

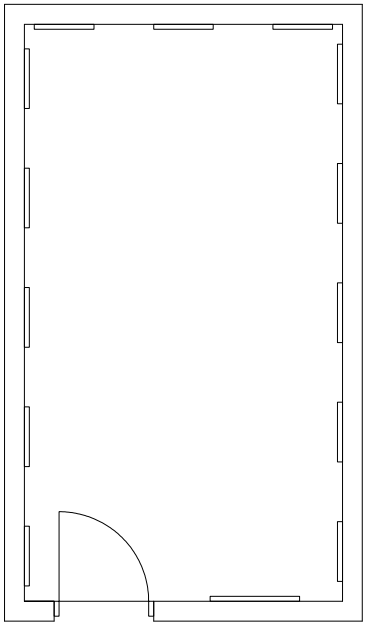

FEATURES:
Fixed Equipment:
NA

LOOSE FURNISHINGS:
Music stands
Music chairs

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units
Acoustical wall treatment

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; single-level switching
2. Technology: Clock
3. Miscellaneous: Provide 4' door

HIGH
PRACTICE ROOM
H-MU-13

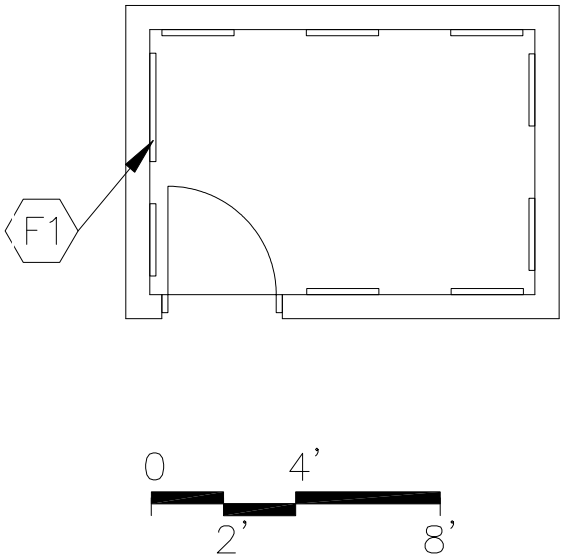

FEATURES:
Fixed Equipment:
3' x 5' high mirror mounted 12" above finish floor

LOOSE FURNISHINGS:
Music stands
Music chairs

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units
Acoustical wall treatment

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching

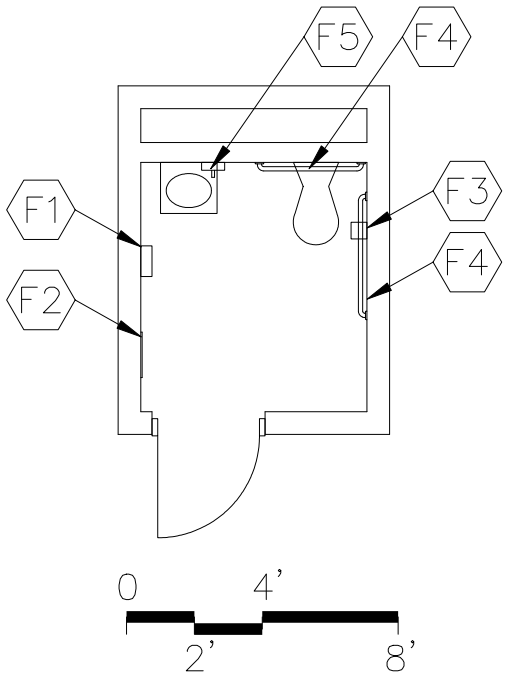

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24" x 60" mirror
F3 Toilet tissue holder
F4 36" and 42" grab bar
F5 Soap dispenser

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient
TER)
Optional: ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Resilient base (optional: CMT, PT, or

Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory~~; floor drain~~
2. Electrical: ~~(1)~~ duplex receptacle; single-level switching

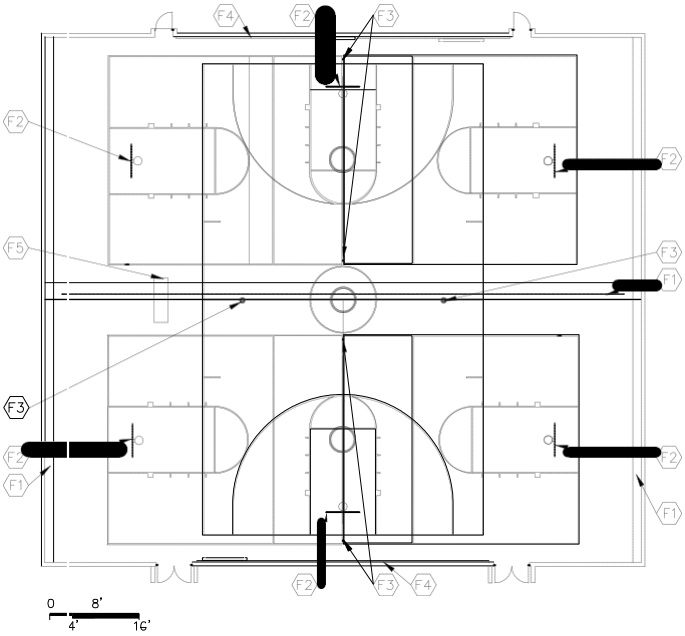

FEATURES:
Fixed Equipment:
F1 Divider gym curtain
F2 Basketball backstops – glass, adjustable height
F3 Volleyball sleeves and standards on a cart
F4 Safety wall wainscot
F5 Scorer table

LOOSE FURNISHINGS:
Portable chalkboard

MISCELLANEOUS:
Handicapped seating
Court markings
Wire guards on light fixtures and wall-mounted electrical devices

FINISHES:
Flooring:
Wood flooring

Base:
Ventilated resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units
Sound absorbing concrete masonry units on 2 walls

NOTES:

1. Electrical: ~~(8)~~ duplex receptacles; single-level switching; scoreboard; telecommunications grounding
2. Technology: ~~(4)~~ video ports, ~~(1)~~ monitor with cart; ~~(1)~~ voice port; ~~(3)~~ data ports; clocks with wire guards

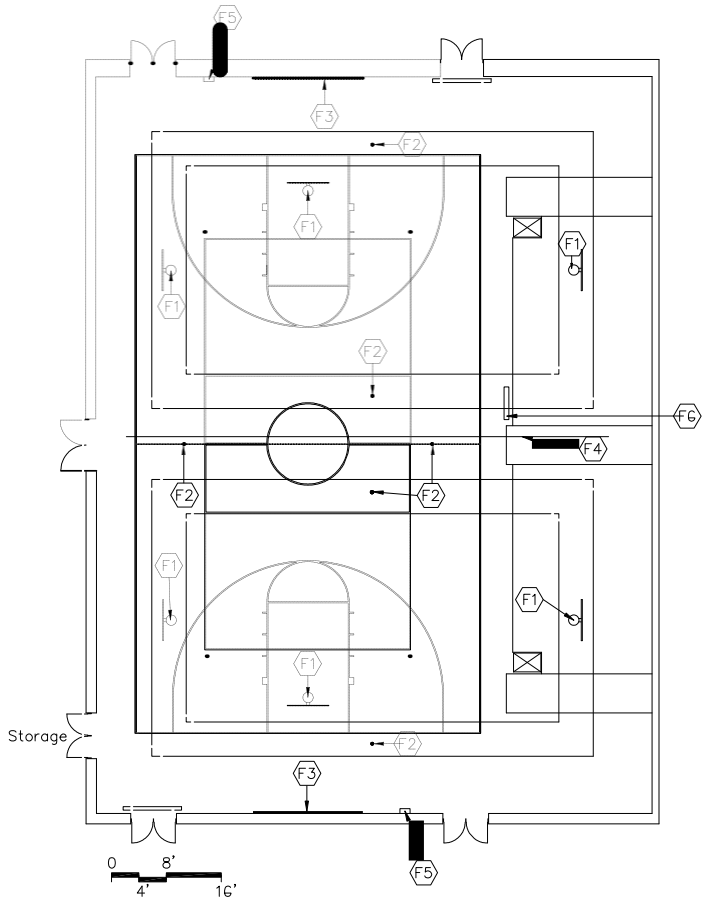

FEATURES:
Fixed Equipment:
F1 Basketball backstops – glass, adjustable height
F2 Volleyball sleeves and standards on a cart
F3 Safety wall wainscot
F4 Divider gym curtain
F5 Chin-up bar
F6 Scorer table

LOOSE FURNISHINGS:
Portable chalkboard

MISCELLANEOUS:
Court markings
Wire guards on light fixtures and wall-mounted electrical devices

FINISHES:
Flooring:
Wood flooring

Base:
Ventilated resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units
Sound absorbing concrete masonry units on 2 walls

NOTES:

1. Electrical: ~~(8)~~ duplex receptacles; single-level switching; scoreboard; telecommunications grounding
2. Technology: ~~(2)~~ video ports, ~~(1)~~ monitor with cart; ~~(1)~~ voice port; ~~(3)~~ data ports; clocks with wire guards

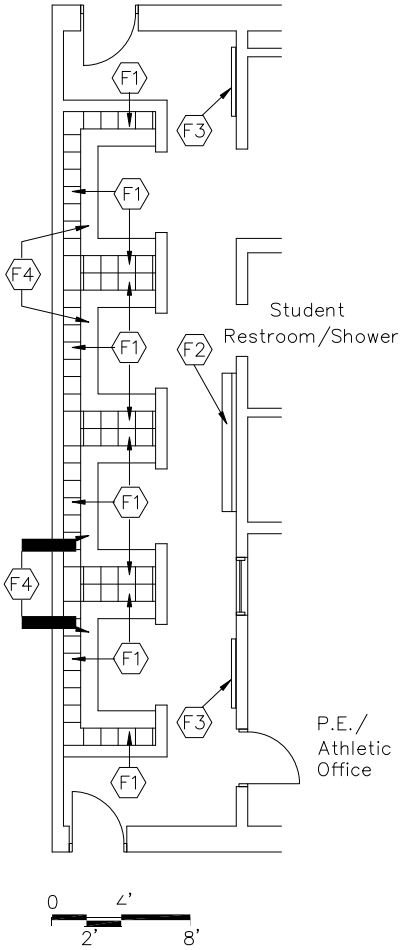

FEATURES:
Fixed Equipment:
F1 Athletic lockers
F2 Chalk/marker board
F3 Tack board
F4 Locker benches

LOOSE FURNISHINGS:
Wastebaskets

FINISHES:
Flooring:
Resilient or sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical with high-impact, hold-down clips (option: exposed, painted, pre-cast units
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching
2. Technology: Clock
3. Plumbing: Drinking fountain

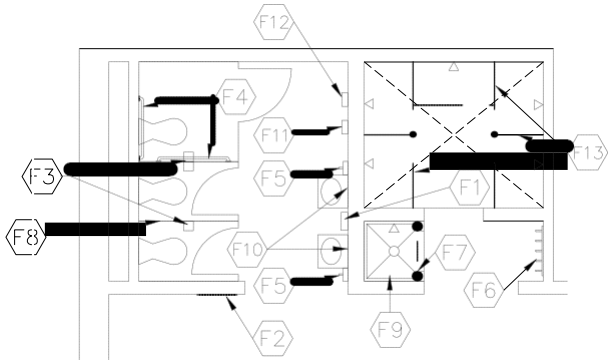

Female Student Locker Room

0 4'
2' 8'

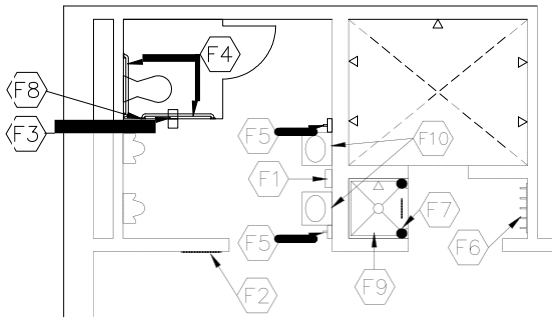

Male Student Locker Room

0 4'
2' 8'

FEATURES:
Fixed Equipment:
F1 Towel dispensers
F2 24" by 60" mirror
F3 Toilet tissue holders
F4 36" and 42" grab bars
F5 Soap dispensers
F6 Towel hooks
F7 Shower curtain and rod
F8 Toilet partitions
F9 ADA shower accessories
F10 16" by 24" mirrors
F11 Sanitary product dispensers
F12 Sanitary product receptacles
F13 Modesty shower partitions

LOOSE FURNISHINGS:
Wastebaskets

FINISHES:

Flooring:
Restroom – Resilient
Shower - Ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Restroom - Resilient base
Shower - Ceramic mosaic tile, porcelain tile, or Terrazzo

Ceiling:
Restroom - Suspended, acoustical with high-impact, hold-down clips
Shower - Painted portland cement plaster or interior finish system

Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching
2. Plumbing: ~~Wall-mounted~~ water closets, lavatories, urinals; ADA shower controls and head; shower fixtures; floor drains

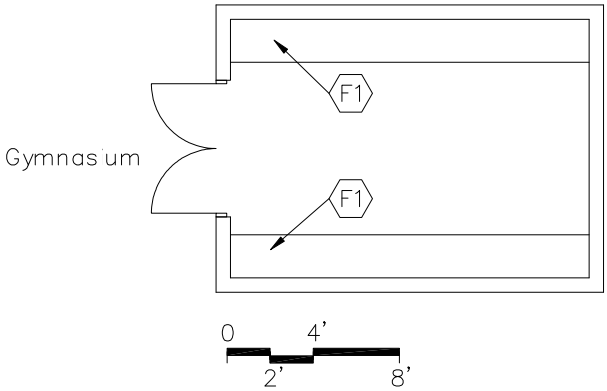

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
Tumbling mats on carts
Ball carts

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

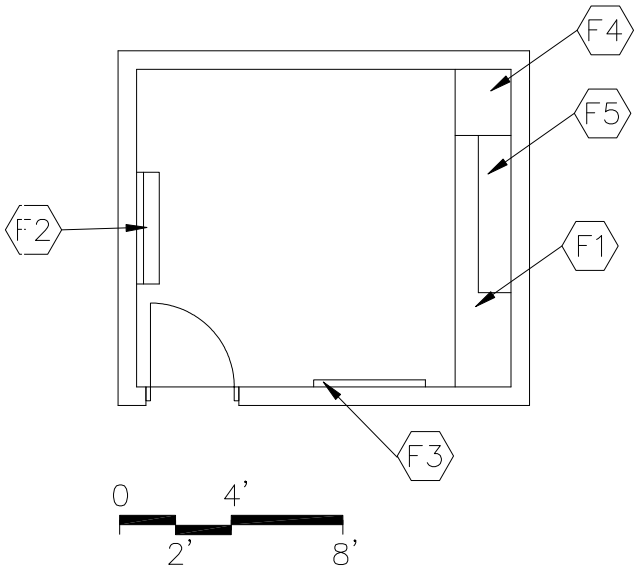

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

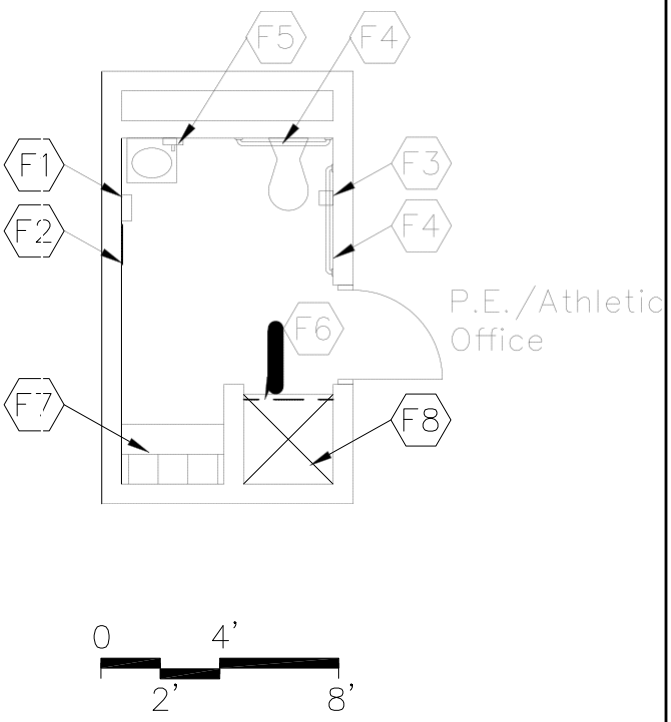

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24" x 60" mirror
F3 Toilet tissue holder
F4 36" and 42" grab bar
F5 Soap dispenser
F6 Shower curtain and rod
F7 3 athletic lockers
F8 ADA shower accessories

LOOSE FURNISHINGS:
Wastebasket

FINISHES:

Flooring:
Restroom - Resilient
Shower - Ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Restroom - Resilient base
Shower - Ceramic mosaic tile, porcelain tile, or terrazzo

Ceiling:
Restroom - Suspended, acoustical
Shower - Painted portland cement plaster or interior finish system

Walls:
Epoxy painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory; ADA shower controls and head; floor drain
2. Electrical: ~~(1)~~ duplex receptacle; single-level switching

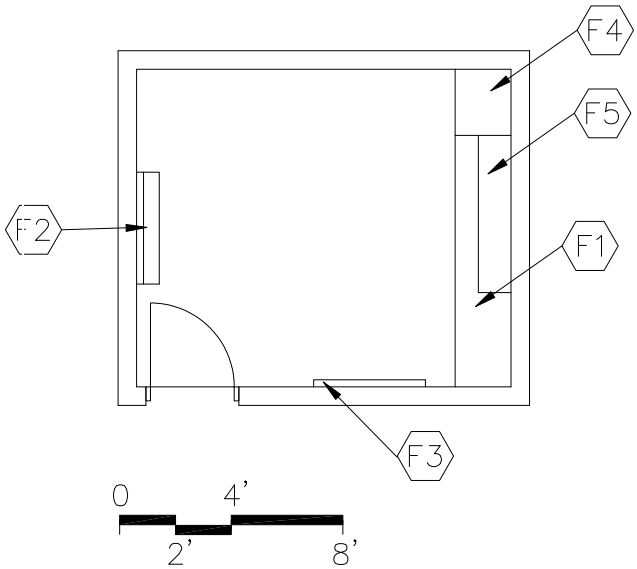

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
File cabinet
Wastebasket

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1) each~~ data port, video port, voice port & phone; clock

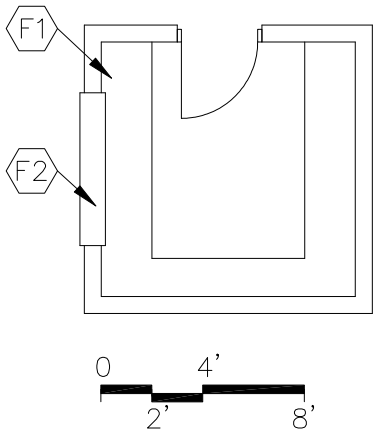

FEATURES: Fixed
Equipment: F1
Base cabinets
F2 Coiling door

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(8)~~ duplex receptacles; single-level switching

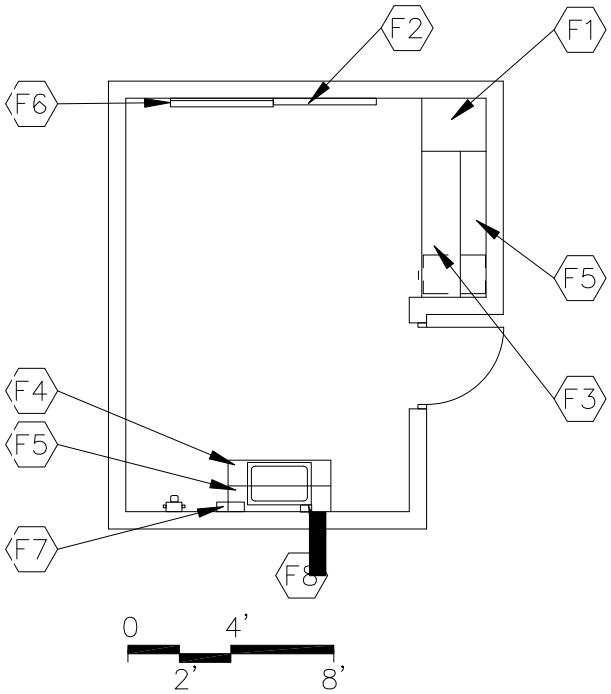

FEATURES: Fixed
Equipment: F1
Tall wardrobe
F2 Tack board
F3 Work surface with file drawers
F4 Sink base cabinet
F5 Wall cabinets
F6 Chalk/marker board
F7 Towel dispenser
F8 Soap dispenser

LOOSE FURNISHINGS:
Chairs
Taping tables
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching; electrical power for ice machine and whirlpool
2. Technology: ~~(1)~~ data port near trainer workstation, ~~(1)~~ voice port & phone; clock
3. Plumbing: Sink
4. Miscellaneous: Ice machine and whirlpool

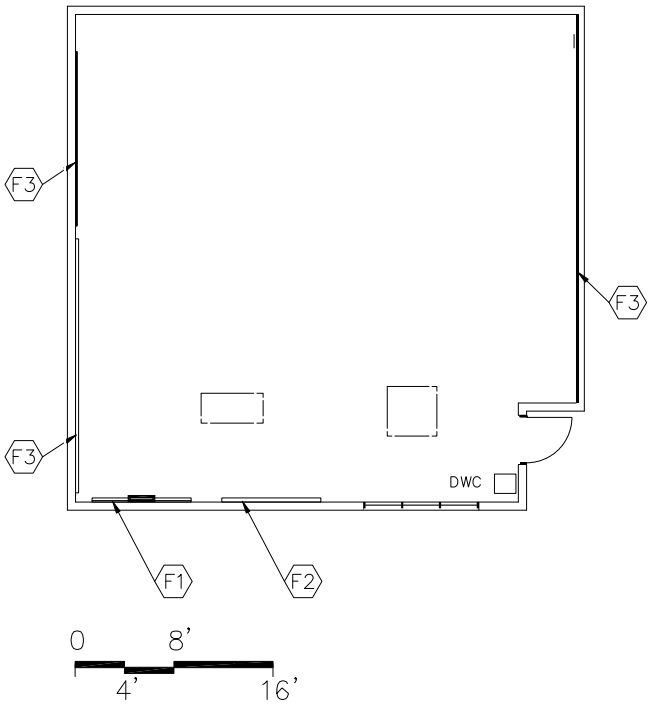

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 40' of 5' high mirror mounted 12" above floor

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(8-10)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port and video display device, data port, voice port; clock
3. Plumbing: Drinking water cooler; plumbing connections
4. Miscellaneous: Weight lifting equipment; stationary bikes; treadmills; stairclimbers; digital weight scale

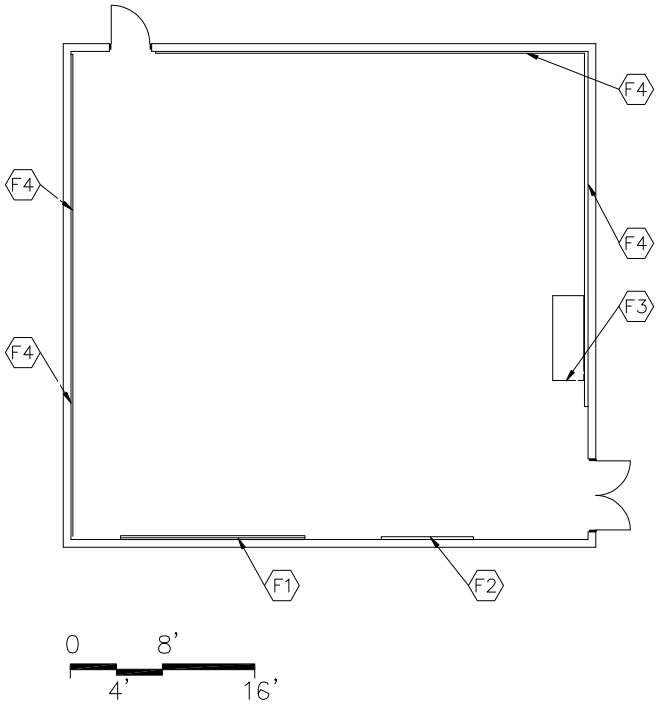

FEATURES:
Fixed Equipment:
F1 Chalk/marker board
F2 Tack board
F3 Mat hoist
F4 Safety wall wainscot

LOOSE FURNISHINGS:
Wrestling mat

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(6)~~ duplex receptacles; multi-level switching
2. Technology: ~~(1) each~~ video port, data port, voice port; clock with wire guards

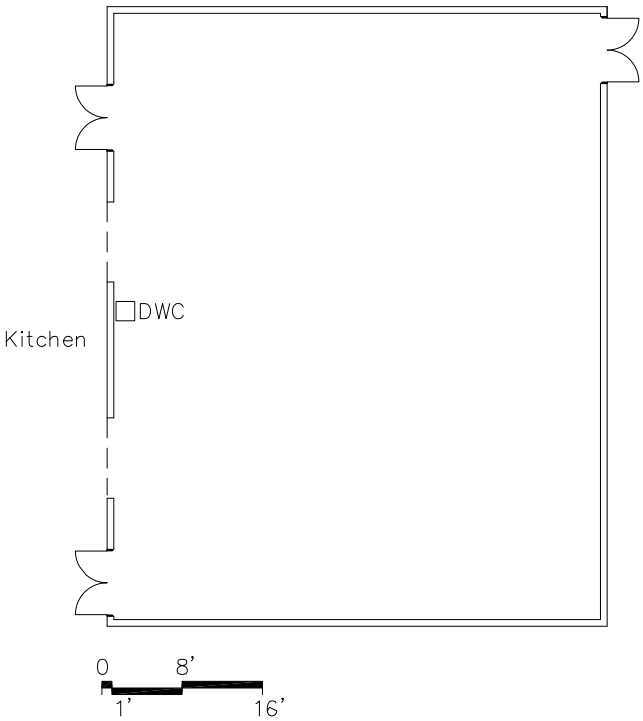

FEATURES:
Fixed Equipment:
NA

LOOSE FURNISHINGS:
Tables
High density stacking chairs
Waste receptacles
Recycling bins
Carts for chairs

FINISHES:
Flooring:
Resilient, porcelain tile, or terrazzo tile

Base:
Resilient, porcelain tile, or terrazzo
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(8)~~ duplex receptacles; multi--level switching; telecommunications grounding
2. Technology: Clocks; overhead projector; ~~(2)~~ video ports; ~~(2)~~ data ports; ~~(2)~~ voice ports
3. Plumbing: Drinking water cooler

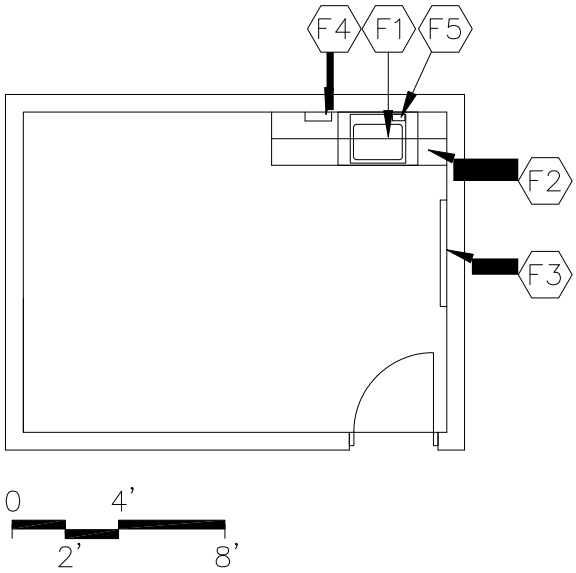

FEATURES:
Fixed Equipment:
F1 Sink base cabinet
F2 Base and wall cabinets
F3 Tack board
F4 Towel dispenser
F5 Soap dispenser

LOOSE FURNISHINGS:
Tables and chairs
Refrigerator
Microwave
Waste receptacle

FINISHES:
Flooring:
Resilient, porcelain tile, or terrazzo tile

Base:
Resilient base (option: porcelain tile base)
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching; receptacles for vending machines, refrigerator, and microwave
2. Technology: ~~(1)~~ video port, voice port and phone; clock
3. Plumbing: Sink
4. Miscellaneous: Vending machines

HIGH
TABLE STORAGE
H-SD-3

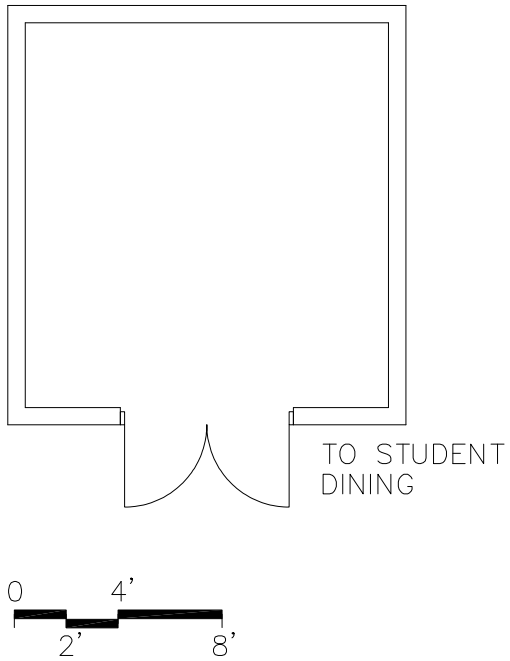

FEATURES:
Fixed Equipment:
NA

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

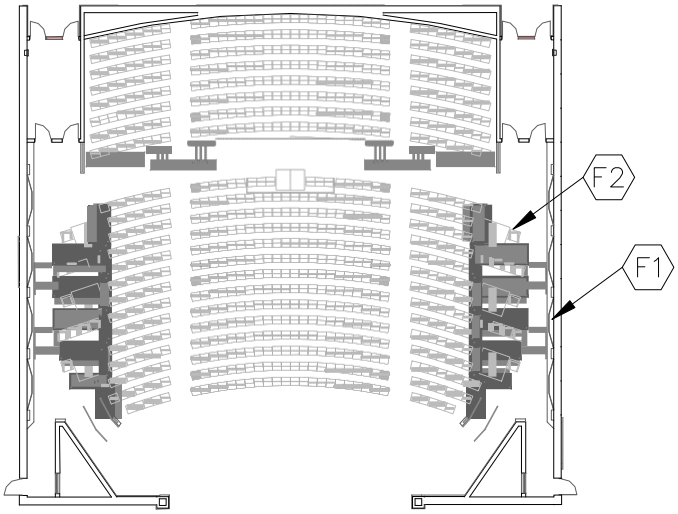

FEATURES:
Fixed Equipment
F1 Acoustical wall treatment
F2 Handicap wheelchair locations
Lighting catwalk

LOOSE FURNISHINGS:
Fixed auditorium seating

FINISHES:
Flooring:
Carpet and sealed concrete

Base:
Resilient base
Ceiling:
Painted, exposed structure; sound baffles
Walls:
Brick; painted concrete masonry units; wood trim

NOTES:

1. Electrical: Special theatrical sound and lighting systems

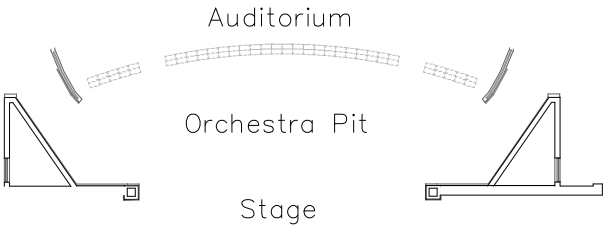

FEATURES:
Fixed Equipment
Cover

LOOSE FURNISHINGS:
Music stands
Music chairs
Conductor podium

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Special lighting; adequate receptacles for instruments and lighting
2. Technology: ~~(1)~~ each video, voice, data port, audio output

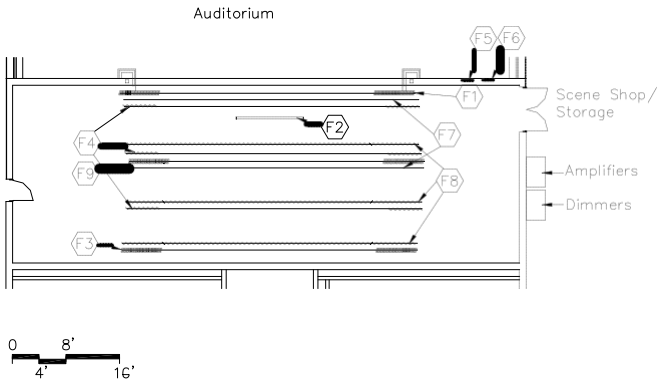

FEATURES:
Fixed Equipment

F1 Front curtain, track, and valance or grand border
F2 Projection screen
F3 Rear curtain with track
F4 Leg curtains, tracks, and/or pivots
F5 Sound control console receptacle
F6 Lighting control console receptacle
F7 Light pipe
F8 Border curtains
F9 Mid-stage traveler

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Stage: Softwood
Thrust: Hardwood

Base:
Ventilated, resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Stage dimming system; theatrical lighting; ~~(6)~~ duplex receptacles; telecommunications grounding
2. Technology: ~~(2)~~ video ports and ~~(2)~~ data ports – 1 on each side of proscenium opening

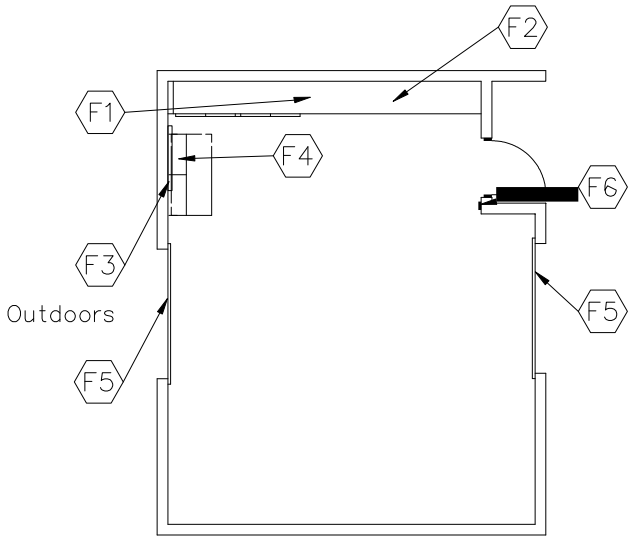

FEATURES:
Fixed Equipment

F1	Tall, lockable storage cabinets
F2	Tall storage cabinets
F3	Tack board
F4	Work bench
F5	Overhead door
F6	Pencil sharpener support

LOOSE FURNISHINGS:
Work tables
Work bench stools
Waste receptacle
Pencil sharpener

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1)~~ each video, voice, and data ports; clock

HIGH SCENE SHOP STORAGE
H-PA-5

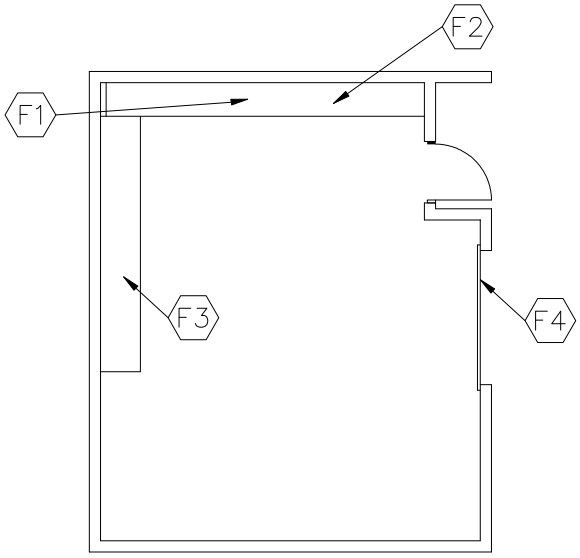

FEATURES:
Fixed Equipment
F1 Tall, lockable storage cabinets
F2 Tall storage cabinets
F3 Base cabinets
F4 Overhead door

LOOSE FURNISHINGS:
Waste receptacle

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching

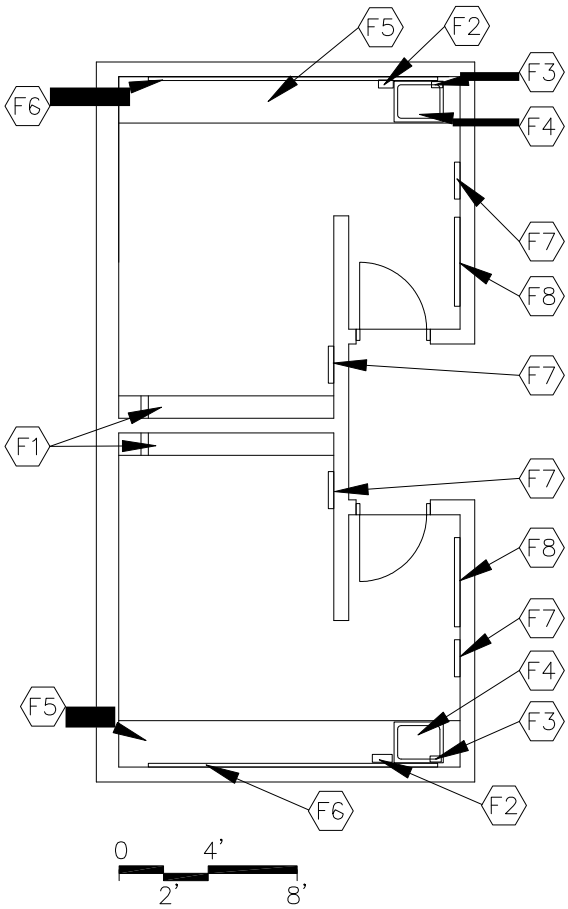

FEATURES:
Fixed Equipment

F1	108" high costume storage cabinets
F2	Towel dispenser
F3	Soap dispenser
F4	Sink base cabinet
F5	Work surface
F6	48" high make-up mirrors - Full length of work surface
F7	20" wide x 60" high dressing mirrors (2 minimum)
F8	Tack board

LOOSE FURNISHINGS:
Chairs
Bench
Mobile costume rack
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; duplex receptacle at each make-up station under mirror; incandescent lighting over make-up mirrors; fluorescent lighting overhead; single-level switching; telecommunications grounding
2. Technology: Clock
3. Plumbing: Sink; plumbing connections

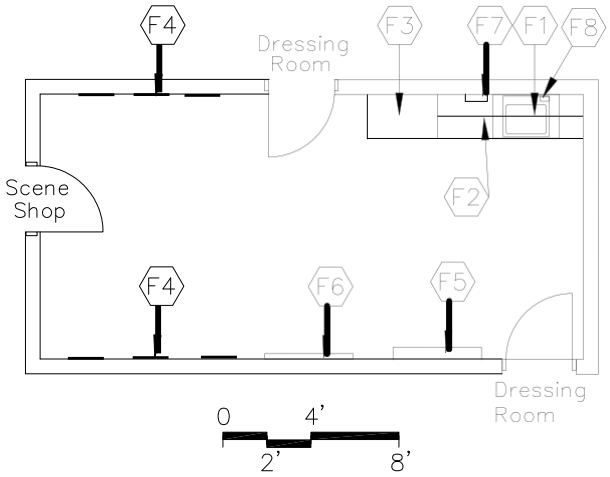

FEATURES:
Fixed Equipment:
F1 Sink base cabinet
F2 Base cabinets
F3 Tall storage cabinets
F4 Mirrors
F5 Chalk/marker board
F6 Tack board
F7 Towel dispenser
F8 Soap dispenser

LOOSE FURNISHINGS:
Lounge furniture
Chairs/stools
Wastebaskets

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(8)~~ duplex receptacles; multi-level switching
2. Plumbing: Sink; drinking fountain
3. Technology: ~~(2)~~ video ports and monitors; ~~(1)~~ voice port and phone

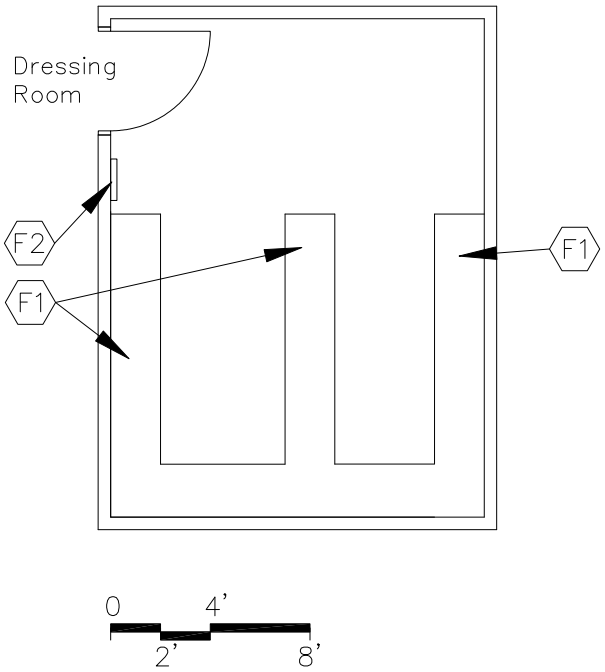

FEATURES:
Fixed Equipment:
F1 High costume storage cabinets
F2 Mirror

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

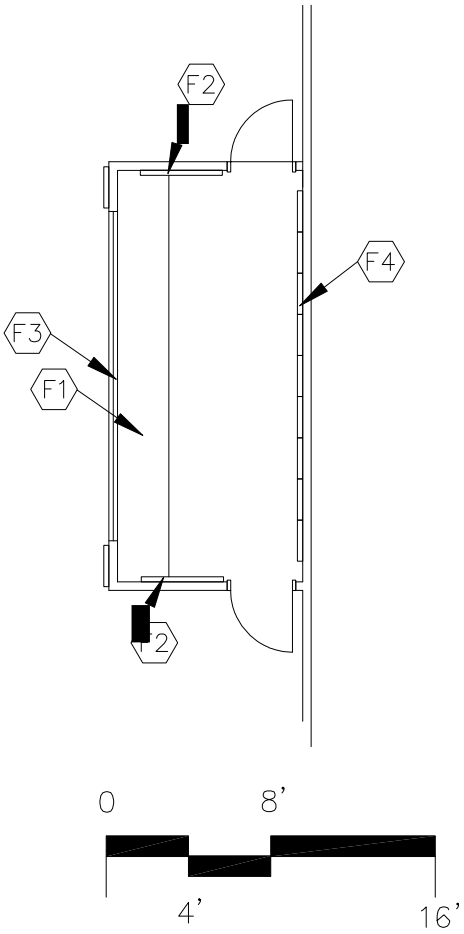

FEATURES:
Fixed Equipment
F1 Equipment/work surface
F2 Tack board
F3 Operable windows
F4 Acoustical wall treatment

LOOSE FURNISHINGS:
Chairs
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
Acoustical wall treatment

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; dimmable incandescent task lighting on work surface; fluorescent lighting overhead; single-level switching; telecommunications grounding; auditorium lighting wired through stage dimmer panel; provisions for hard-wired equipment; empty communications conduit with pull cable from stage for future video projection control; stage dimming system control panel
2. Technology: Clock; ~~(1)~~ voice port and phone; ~~(1)~~ video port, ~~(2)~~ data ports

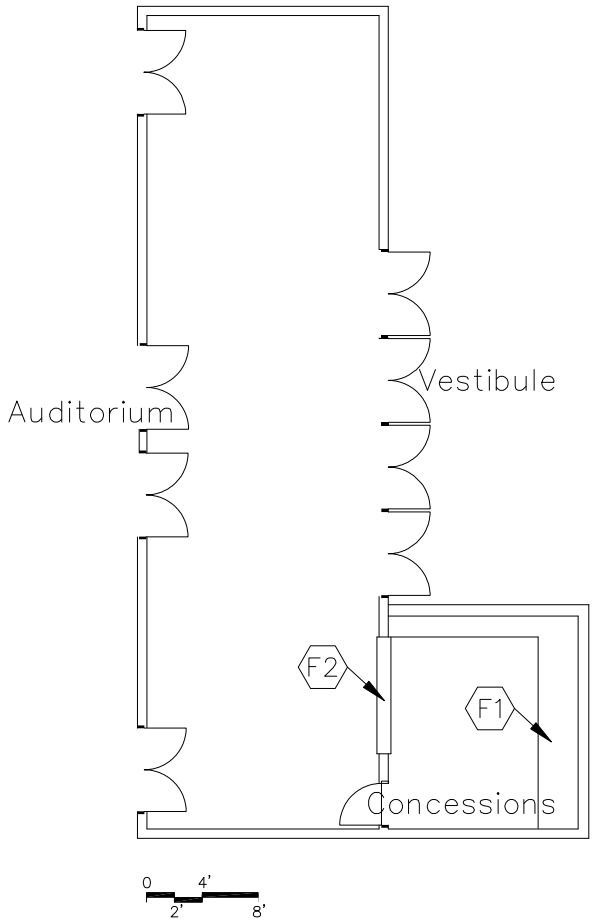

FEATURES: Fixed
Equipment: F1
Base cabinet
F2 Coiling door

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Porcelain tile or terrazzo

Base:
Porcelain tile or terrazzo base
Ceiling:
Suspended, acoustical
Walls:
Ceramic tile, brick, painted concrete masonry units, acoustical wall treatment

NOTES:

1. Electrical: ~~(8)~~ duplex receptacles; multi-level switching; accent lighting; receptacles for concession equipment

HIGH
TICKET BOOTH
H-PA-11

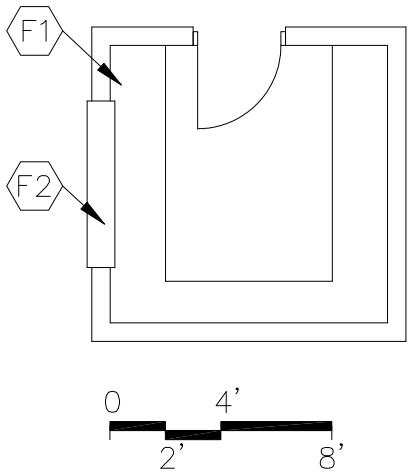

FEATURES:
Fixed Equipment
F1 Base cabinets
F2 Coiling door

LOOSE FURNISHINGS:
Waste basket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(2)~~ duplex receptacles; single-level switching

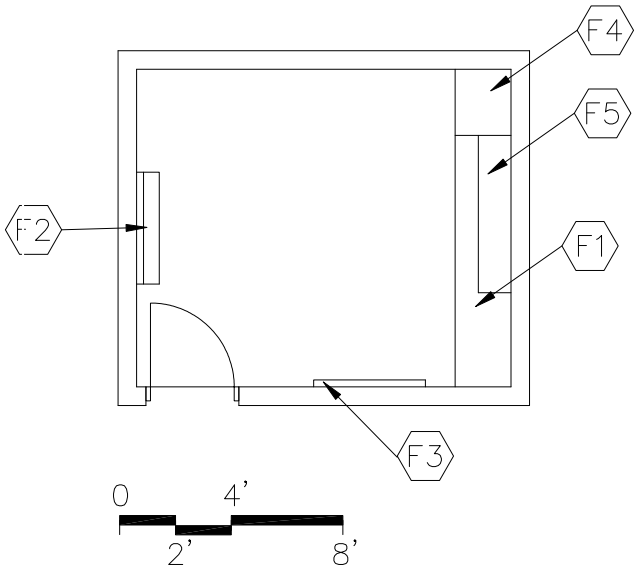

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket(s)

FINISHES:
Flooring:
Carpet

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted gypsum wallboard
over metal studs or
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1)~~ each data port, video port, voice port & phone; clock

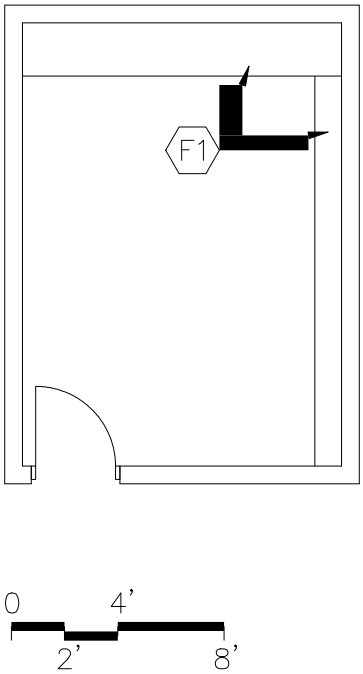

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
N/A

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical or
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

HIGH WARMING KITCHEN
H-FS-1

This space consists of various areas:

Production Area	~~25%~~
Serving Area	~~35%~~
Warewash	~~25%~~
Storage	~~10%~~
Receiving	~~5%~~

Additional areas to be added: office, restroom, locker room, janitorial closet

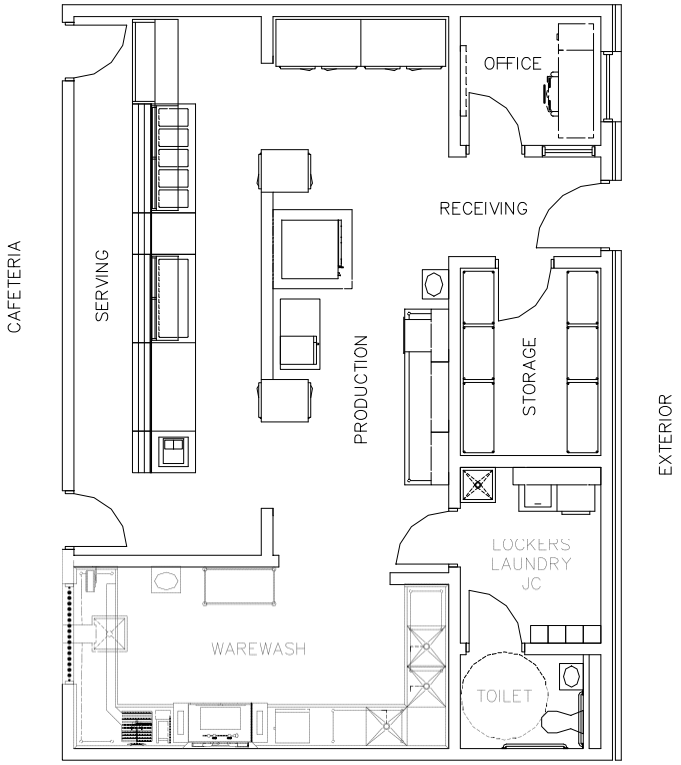

FEATURES:
Fixed Equipment
Food Service Equipment

LOOSE FURNISHINGS:
NA

NOTE:
Kitchen area must be located adjacent to exterior loading dock area to receive transported food from central kitchen.

FINISHES:
Flooring:
Quarry Tile

Base:
Quarry tile base
Ceiling:
Cleanable, suspended, acoustical
Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: Dual level switching; ~~(10)~~ duplex receptacles; connections to food service equipment
2. Technology: ~~(1)~~ each voice port and phone, data port at cash register; clock
3. Plumbing: Hand washing lavatory; plumbing and gas connections; connections to food service equipment; floor drains
4. HVAC: Kitchen canopy exhaust system

This space consists of various areas:

Production Area	~~25%~~
Serving Area	~~35%~~
Warewash	~~25%~~
Storage	~~10%~~
Receiving	~~5%~~

A space plate follows for each of these spaces.
Additional areas to be added: office, restroom, locker room, janitorial closet

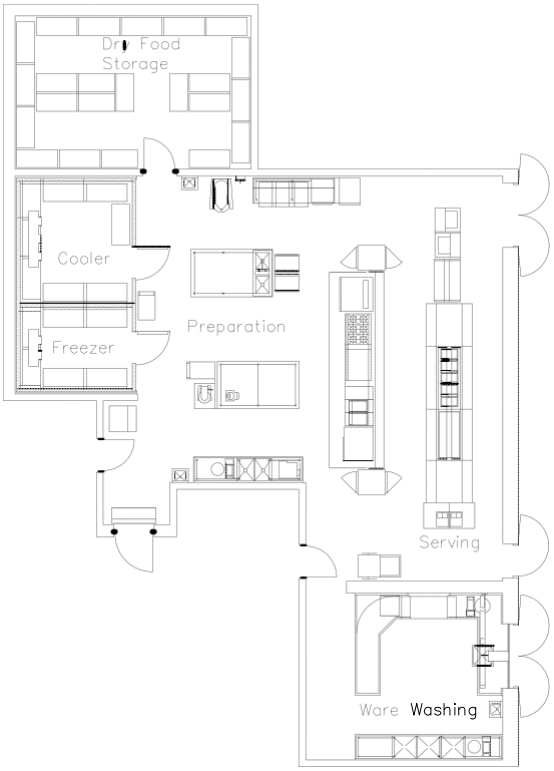

FEATURES:
Fixed Equipment
Food Service Equipment

LOOSE FURNISHINGS:
NA

~~NOTE:~~
~~The sizing of the kitchen area assumes Type "A" meal service only at 80% of the student capacity and 3, 30-minute serving periods.~~

FINISHES:
Flooring:
Quarry Tile

Base:
Quarry tile base
Ceiling:
Cleanable, suspended, acoustical
Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: Dual level switching; ~~(10)~~ duplex receptacles; connections to food service equipment
2. Technology: ~~(1)~~ each voice port and phone, data port at cash register; clock
3. Plumbing: Hand washing lavatory; plumbing and gas connections; connections to food service equipment; floor drains
4. HVAC: Kitchen canopy exhaust system

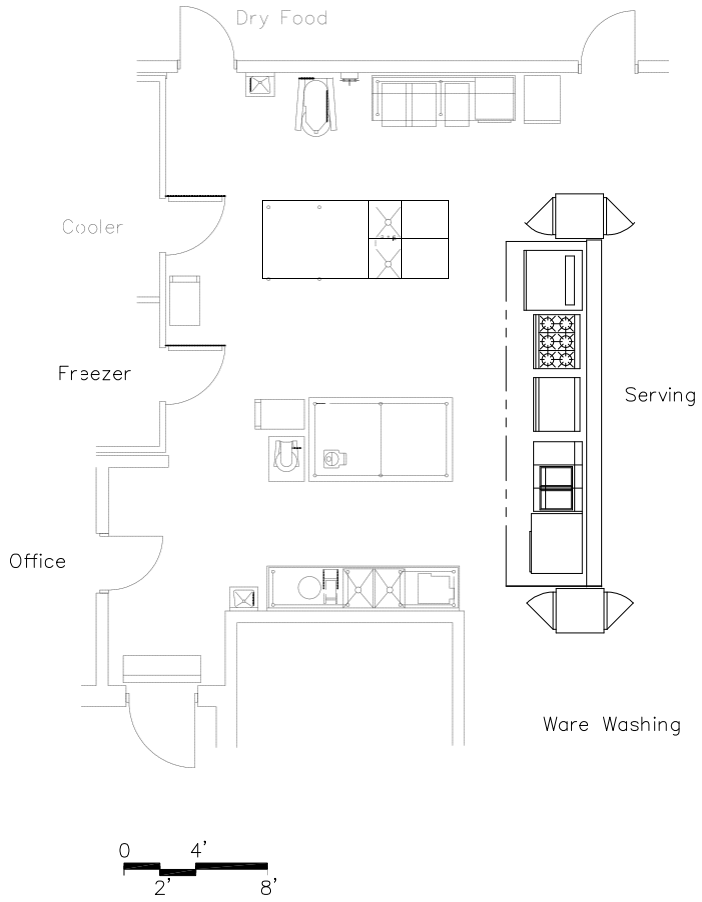

FEATURES:
Fixed Equipment:
Food service equipment

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Quarry Tile

Base:
Quarry tile base
Ceiling:
Cleanable, suspendable, acoustical
Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; dual-level switching; connections to food service equipment
2. Technology: Voice port & phone; clock
3. Plumbing: Plumbing and gas connections; hand washing lavatory; floor drains

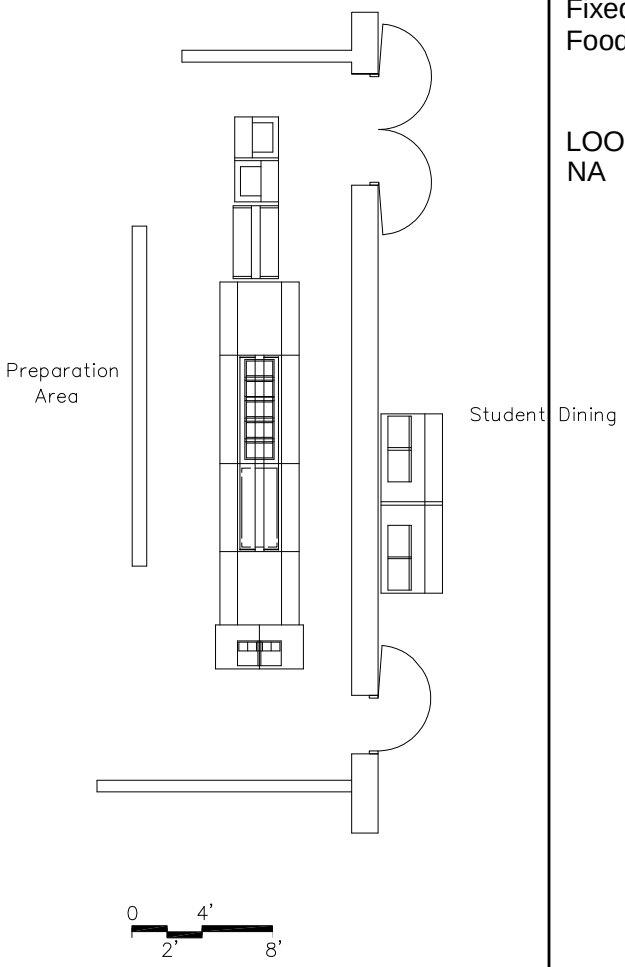

FEATURES:
Fixed Equipment:
Food service equipment

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Quarry Tile (optional: porcelain tile)

Base:
Quarry tile base (optional: PT)
Ceiling:
Cleanable, suspendable, acoustical
Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; dual-level switching; connections to food service equipment
2. Technology: Voice port & phone; clock; data port at cash register
3. Plumbing: Connections to food service equipment

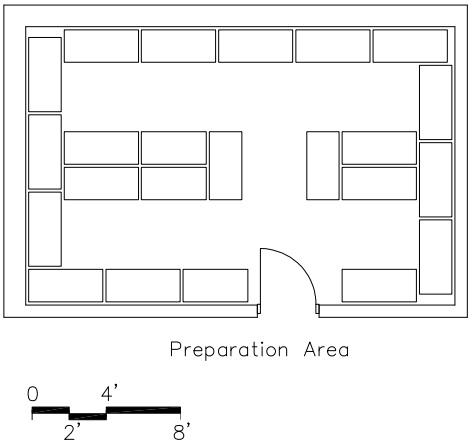

FEATURES:
Fixed Equipment:
Food service equipment

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Cleanable, suspendable, acoustical
Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching

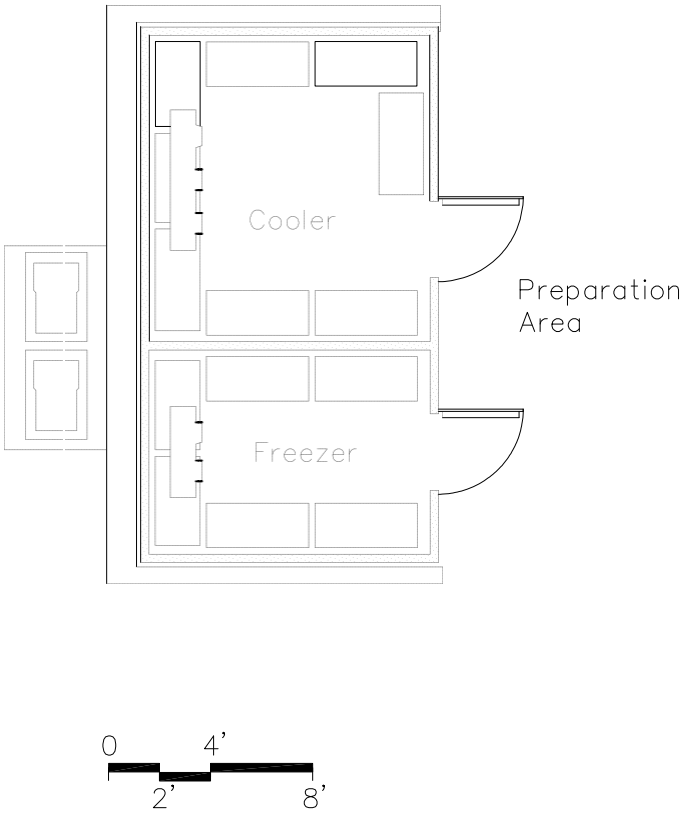

FEATURES:
Fixed Equipment:
Food service equipment

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Quarry Tile

Base:
Quarry tile base
Ceiling:
Manufactured insulated panel
Walls:
Manufactured insulated panel

NOTES:

1. Electrical: Single-level switching; electrical connections to freezer/cooler refrigeration equipment

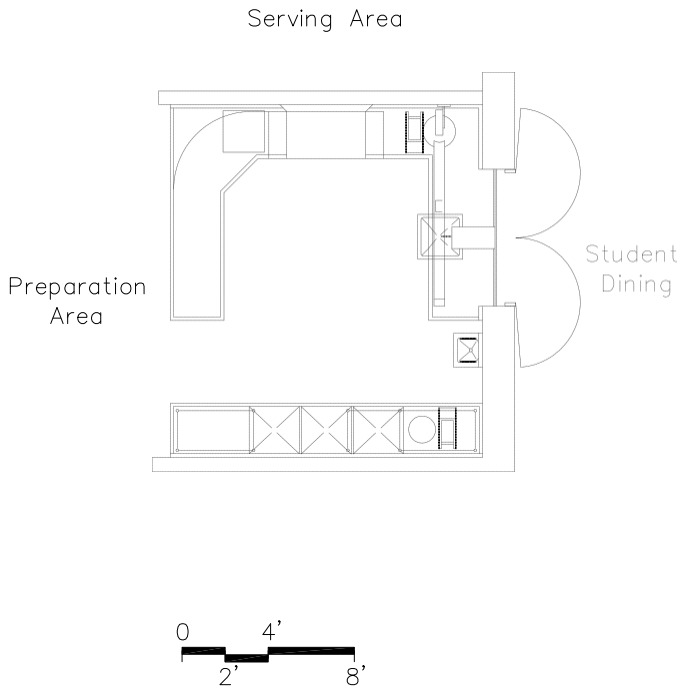

FEATURES:
Fixed Equipment:
Food service equipment

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Quarry Tile

Base:
Quarry tile base
Ceiling:
Cleanable, suspendable, acoustical
Walls:
Epoxy-painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; dual-level switching; connections to food service equipment
2. HVAC: Exhaust hood system
3. Plumbing: Lavatory

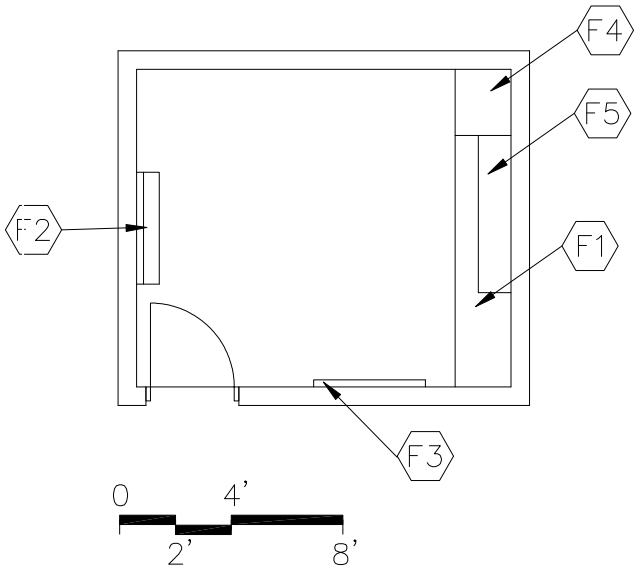

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1)~~ each data port, video port, voice port & phone; clock

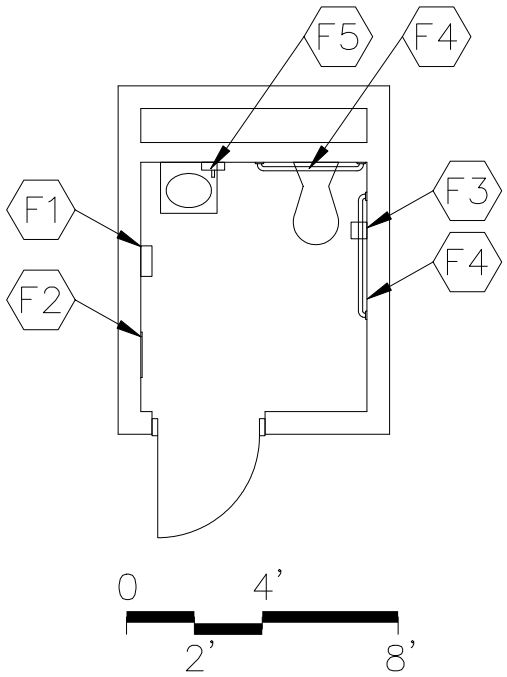

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24" x 60" mirror
F3 Toilet tissue holder
F4 36" and 42" grab bar
F5 Soap dispenser

LOOSE FURNISHINGS:
Wastebasket

FINISHES:
Flooring:
Resilient
Optional: ceramic mosaic tile, porcelain tile, or terrazzo

Base:
Resilient base (optional: CMT, PT,or TER)
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closet and lavatory~~; floor drain~~
2. Electrical: Single-level switching; ~~(1)~~ duplex receptacle

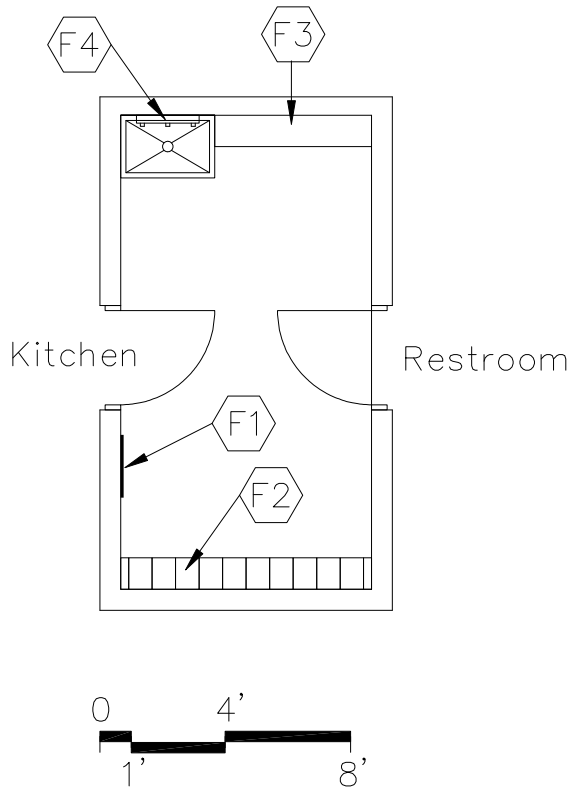

FEATURES:
Fixed Equipment:
F1 24" x 60" mirror
F2 Lockers
F3 Wall cabinets
F4 Mop holder

LOOSE FURNISHINGS:
Chairs
Washer
Dryer
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical, with high-impact, hold-down clips (option: exposed, painted pre-cast units)
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: Floor service sink; floor drain
2. Electrical: Single-level switching; ~~(1)~~ duplex receptacle
3. HVAC: Dryer vent system; exhaust air system
4. Technology: Clock

HIGH WORKROOM H-CU-1

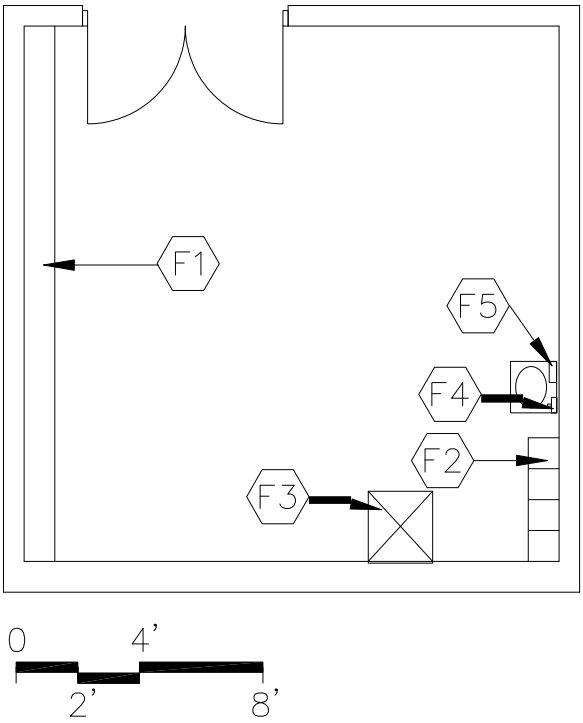

FEATURES:
Fixed Equipment:
F1 Metal shelving
F2 Lockers
F3 Mop holder
F4 Soap dispenser
F5 Towel dispenser

LOOSE FURNISHINGS:
Workbench
Stool
Recycling bins
Waste receptacles

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Suspended, acoustical or painted structure

Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacle; single-level switching; electrical receptacles for custodial equipment

2. Plumbing: Floor service sink; handwash sink

3. Technology: Voice port and phone; clock

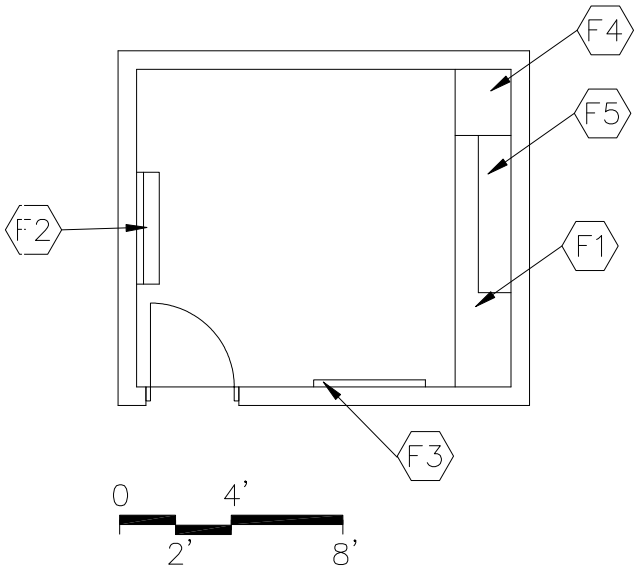

FEATURES:
Fixed Equipment:
F1 Work surface with file drawers
F2 Chalk/marker board
F3 Tack board
F4 Tall wardrobe
F5 Wall cabinets

LOOSE FURNISHINGS:
Desk and chair
Computer desk return
Visitor chairs
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(4)~~ duplex receptacles; single-level switching
2. Technology: ~~(1)~~ each data port, voice port & phone; clock; modem port for temperature controls computer

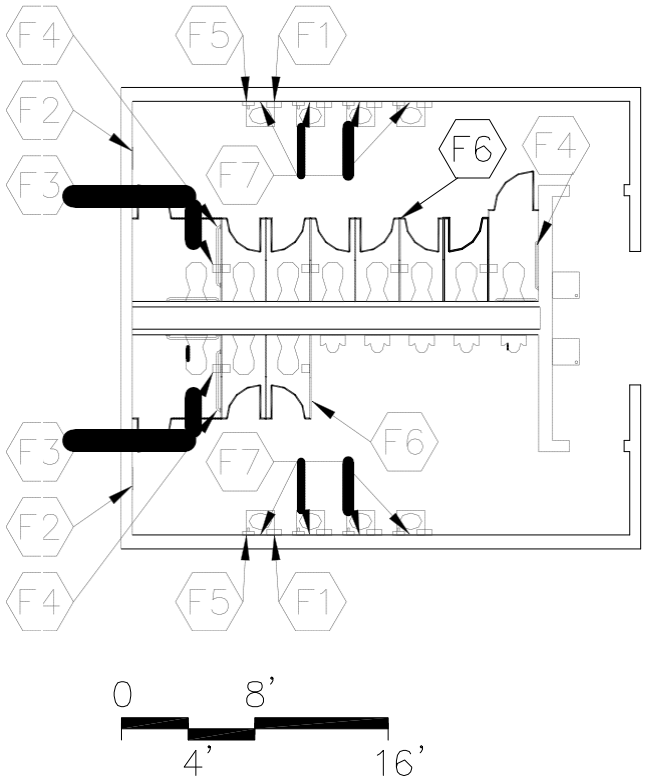

FEATURES:
Fixed Equipment:
F1 Towel dispenser
F2 24" x 60" mirror
F3 Toilet tissue holder
F4 36" and 42" grab bar
F5 Soap dispenser
F6 Toilet partitions
F7 16" x 24" mirrors

LOOSE FURNISHINGS:
Waste receptacles

FINISHES:
Flooring:
Ceramic mosaic tile
Optional: porcelain tile or terrazzo tile

Base:
Ceramic mosaic tile base
Optional: Structural glazed tile base or porcelain tile base
Ceiling:
Suspended, acoustical
Option: Abuse-resistant gypsum wallboard
Walls:
Painted concrete masonry units

NOTES:

1. Plumbing: ~~Wall-mounted~~ water closets, urinals, lavatories, and hydrants; water coolers; floor drains
2. Electrical: Single-level switching; ~~(1)~~ duplex receptacle

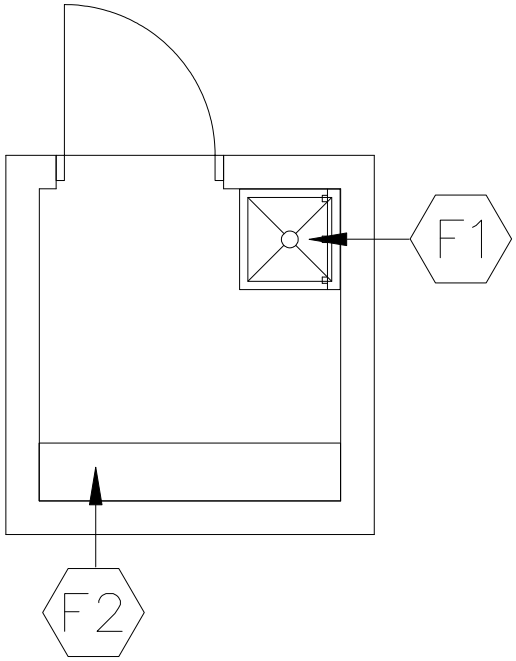

FEATURES:
Fixed Equipment:
F1 Mop holder
F2 Wall cabinets

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching
2. Plumbing: Service sink ~~or~~ and floor drain sink

HIGH ELECTRICAL CLOSET H-BS-3

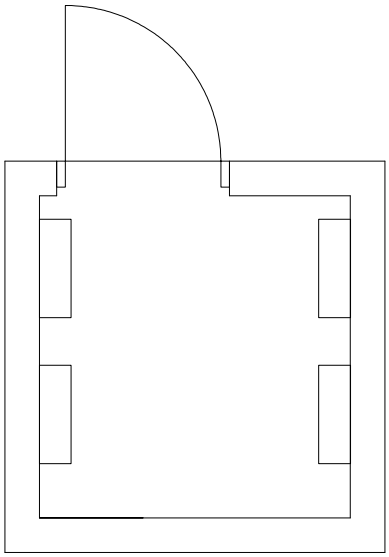

FEATURES:
Fixed Equipment:
NA

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching; electrical switchgear

HIGH TELECOMMUNICATIONS ROOM H-BS-4

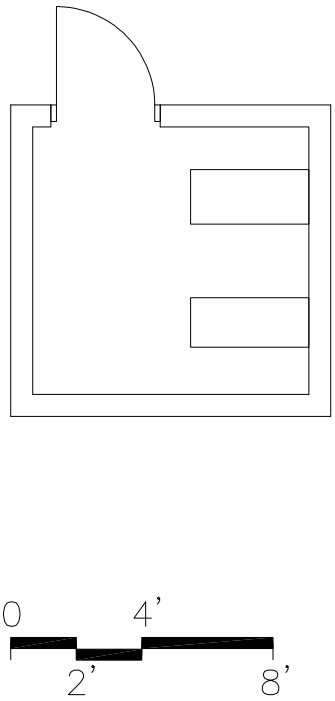

FEATURES:
Fixed Equipment:
NA

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(1)~~ duplex receptacle; single-level switching; telecommunications grounding
2. Technology: Technology equipment; plywood backboard

Corridors shall be a minimum of 8 feet wide.

Corridors are to meet the egress requirements applicable codes.

Instructional and activity areas shall be accessible by corridors without passing through another instructional or activity area.

Area of vestibules is to be included within area allotted for corridors.

Width of vestibules can be no less than minimum width of adjacent corridor.

Minimum corridor length recommended is 8 feet between doors.

Vestibules are to be provided at major entrances/exits.

FEATURES:
Fixed Equipment:
Fire extinguishers and cabinets
Recessed vinyl floor mats or surface mats

LOOSE FURNISHINGS:
Recycling bins and waste receptacles

FINISHES:
Flooring:
Resilient, porcelain tile, or terrazzo

NOTE: At entries adjacent to dining/commons area, match dining/commons flooring.

Base:
Resilient base(option:structural glazed tile)
Ceiling:
Suspended, acoustical
Option in vestibules: abuse-resistant gypsum wallboard
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Duplex receptacles; dual-level switching
2. Technology: Clocks, wireless access points; video ports
3. Plumbing: Drinking water coolers
4. Miscellaneous: Display cases

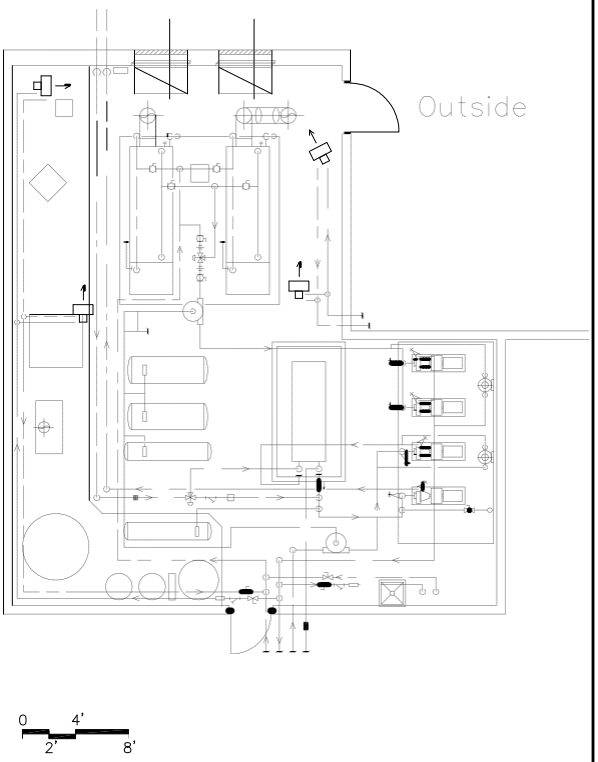

FEATURES:
Fixed Equipment:
To be determined by Design Professional

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Exposed, painted structure
Walls:
Painted concrete masonry units
(option: can use metal panel on CMU or metal panel on metal framing wall system for penthouse)

NOTES:

1. Electrical: Dual-level switching; to be determined by Design Professional
2. Plumbing: To be determined by Design Professional

HIGH STORAGE AREA H-BS-7

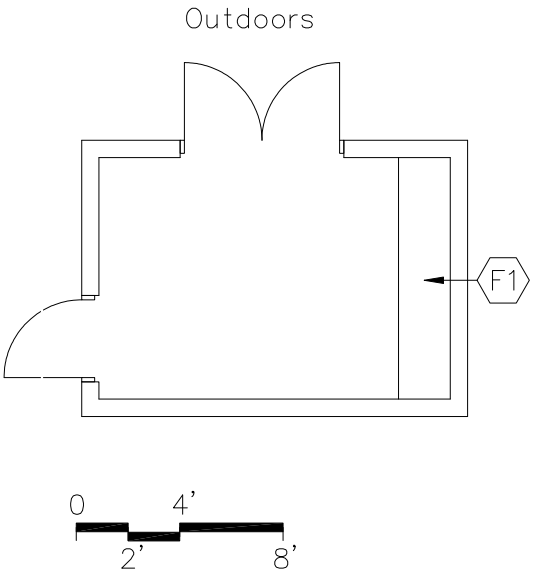

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Single-level switching; duplex receptacles

HIGH
CENTRAL STORAGE AREA
H-BS-8

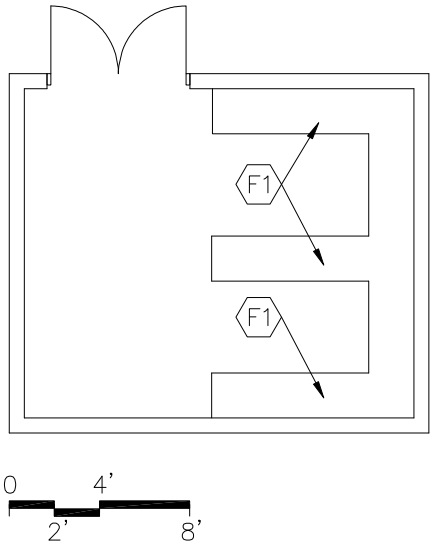

FEATURES:
Fixed Equipment:
F1 Open metal shelving

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Exposed, painted structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Single-level switching; duplex receptacles

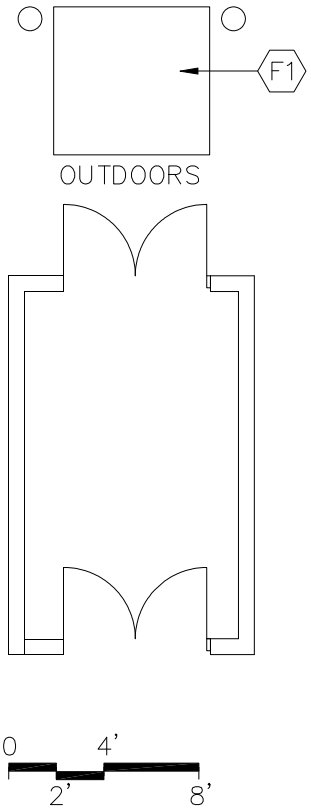

FEATURES:
Fixed Equipment:
F1 Loading dock leveler and dock bumpers

LOOSE FURNISHINGS:
NA

FINISHES:
Flooring:
Sealed concrete

Base:
Resilient base
Ceiling:
Painted, exposed structure
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: Single-level switching; duplex receptacles

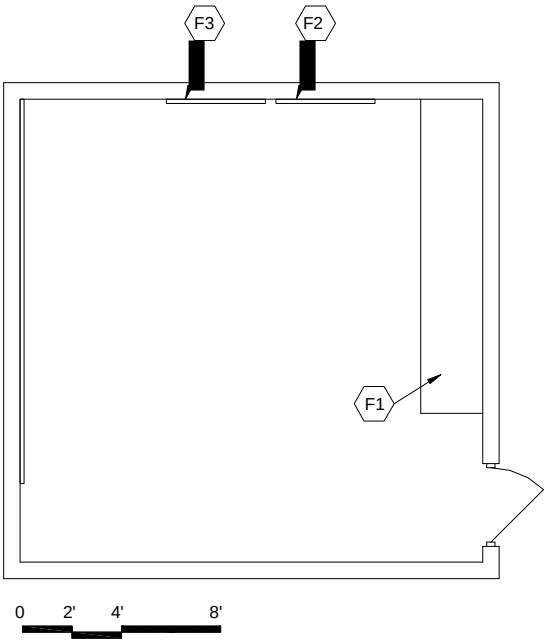

FEATURES:
Fixed Equipment:
F1 Open metal shelving
F2 Tack board
F3 Chalk/marker board

LOOSE FURNISHINGS:
Desk and chair
Wastebasket

FINISHES:
Flooring:
Resilient

Base:
Resilient base
Ceiling:
Suspended, acoustical
Walls:
Painted concrete masonry units

NOTES:

1. Electrical: ~~(3)~~ duplex receptacles; single-level switching; telecommunications grounding
2. Technology: ~~(1)~~ each data port, voice port & phone; technology equipment; plywood backboard
3. Miscellaneous: Provide distribution equipment with an equipment electrical ground.